Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

CONTENTS

FORWARD

SECTION 1 ADMINISTRATIVE REPORT

PART I

AIR CONDITIONING

REFRIGERATION

AIR BALANCE

HEATING SYSTEM

CONTROLS

PART II

PROCESS WATER SYSTEMS & COMPRESSED AIR

PART III

ELECTRICAL

PART IV

MAINTENANCE & SPARE PARTS

PART V

SUMMARY

SECTION 2 ENGINEERING DATA

APPENDIXES

- A. TEMP CHARTS (AIR HANDLERS)
- B. PSYCHROMETRIC CHARTS 1-5
- C. EQUIPMENT REPORTS
- D. EQUIPMENT FIELD DATA-
- E. PROCESS TEMP. CHARTS
- F. ELECTRICAL TEST RESULTS
- G. MAINTENANCE AND SPARE PARTS
- H. DRAWINGS

FORWARD

SCOPE OF PROJECT

The project is identified as follows:

Name: Utilities System Study

STATINTL

STATINTL

Project Number:

Description:

Location:

This report is for the purpose of providing an anlysis of the capacity and reliability of the hereinafter designated utilities systems. It is intended to include only major utility components and distribution therefor within

The utilities systems to be included in this analysis and report are (a) Electrical Power (b) Airconditioning (the chilled water systems and the airhandling and distribution systems and the automatic control systems (c) Compressed Air, and (d) the Process Water (Note: There are three systems of processed water. They are cold water (45 degrees), ambient water (70 to 72 degrees), and hot water (145 degrees).

Their analysis shall indicate the total capacities of each system, system loadings, and the excess or deficiency in capacity of each system. The analysis will also concern itself with rates of consumption and when they occur and recommend methods of operation of all systems.

In addition to the above, the report shall include an evaluation of the life expectancy of major functional components of present systems equipment. Include conclusions on spare parts adequacy; for example, seals for the vacuum pumps, etc.

The final report shall include charts, graphs, and recorded data, and all necessary sketches and diagrams required to present a usable management tool for operational planning purposes. All sketches, diagrams, and exhibits submitted shall not be larg er than 24'' x 36'' and capable or being folded into the 8-1/2''x 11'' size of the report.

STATINTL

TAB

SECTION 1

PART I

AIR CONDITIONING

REFRIGERATION

A. DESIGN

The original design called for two 800-ton absorption type chillers using steam from the central heathfull central heathfull system and condenser water from two cooling towers on the roof of the north end of equipment room. Each chiller has a chilled water and a condenser water pump. The condenser water runs in a single supply and return header to the cooling towers. The chilled water runs in a single supply and return header with branch takeoffs to the air handlers.

Flow thru the air handling units cooling coils is regulated by 3-way mixing valves in the return lines from the units.

Chiller No. 1 and 2 chilled water pumps were each designed to deliver 1920 GPM at 75 feet head. Each condenser water pump was designed to deliver 3100 GPM at 85 feet head. Design chilled water flow thru Air Handling Unit 1 was 782 GPM. Design flow thru Air Handling Units 2, 3 and 4 was 774 GPM and thru Air Handling Unit 5 was 565 GPM, with a 10° chilled water temperature rise. The cooling coils are sprayed so that the cold air supply is saturated air.

B. MODIFICATION TO DESIGN

During the six-year occupancy several major changes have been accomplished.

A new 748-ton absorption chiller was installed including an over-sized cooling tower cell. The chilled water pump for chiller No. 3 was designed to deliver 1800 GPM @ 90-foot head. The condenser water pump was designed to deliver 3100 GPM @ 85 ft. head.

The chilled water piping system was modified. A reverse return loop was installed to prevent short cycling of chilled water thru three-way valves into the chiller intake connections.

C. CURRENT CONDITIONS

- 1. With outdoor conditions of 92°F dry bulb and 73° wet bulb, chiller No. 1 had a flow of 1660 GPM and a 6°F temperature drop. This represents 415 tons of cooling capacity. Chiller No. 2 had a flow of 1600 GPM and 6°F temperature drop. This is 400 tons of cooling capacity. Chiller No. 3 had a flow of 1180 GPM and 7°F temperature drop. This is 342 tons of cooling capacity. This totals 1157 tons.
- 2. Flow thru the air handling units coils could not be measured as the available flow meter could not be adapted to the orifice connections on the chilled water lines to the air handlers.

- 3. The head on chiller No. 1 chilled water pump, according to the gages, is 79 feet. On the chilled water pump for chiller No. 2 it is 86 feet, and for chiller No. 3 chilled water pump 67 feet.
- 4. Condenser water flow from the cooling tower is as follows: Chiller No. 1-2700 GPM at 102 feet head; Chiller No. 2 2-3000 GPM at 106 feet head. Chiller No. 3-1760 GPM pressure gage was inoperable.
- 5. The 3-way valves controlling the chilled water to the air handlers are operated from the control room. All are kept at full-open position during the summer months.
- 6. The following are the maximum and minimum temperatures of the main supply cold air duct from the air handling units for a certain time period. Also, the maximum and minimum outside air temperatures for the same time period.

Air Handling Unit No.	Cold Du		Outside Min,		Time Period
1	54.6°	56.5°	76.2°	86.6°	21 hrs.
2	53.8°	55.8°	76.8°	86.6°	21 hrs.
3	55.0°	58.0°	76.0°	91.8°	22 hrs.
4	61.5°	63.0°	88.5°	93.2°	6 hrs.
5	61.5°	66.9°	82.5°	97.5°	23 hrs.

(See Appendix A for Sample Charts.)

7. The entering and leaving chilled water temperatures to the air handling units coils are as follows:

Air Handling Unit	Water In	Water Out
1	42°	50°
2	42°	*
3	42°	48°
4	42°	*
5	42°	52°

* No Thermometer

Combining these with the air flow readings gives the total load on the coil at conditions. Using these total loads and the readings of the chilled water temperature rise thru the air handling units coils, the flow of chilled water can then be calculated.

Air Handling Total Load Unit No. BTUH		Chilled Water Temp Rise Thru Coil	Flow GPM
	_		
1	₂ 5,120,000	8°	1275
2	2,560,000	6°*	8 55
3	2,180,000	6°	725
4 ·	2,570,000	6°*	855
5	2,840,000	10°	565
-		TOTAL GPM	4275

^{*}Assumed-thermometer missing but return to chillers averaged 6+ degrees rise.

The flow thru the chilled water coil of air handling units No. 1 is 60% more than its original design capacity, air handling units No. 2 and No. 4 are 10% in excess, air handling Unit No. 3 is 10% less than capacity and air handling Unit No. 5's chilled water flow is at design capacity. Only the cooling coil of air handling Unit No. 5 is operating at design capacity; however, the leaving air temperature of 66.5°F drybulb is 12.5° above design due to the high percentage of outside air.

D. OBSERVATIONS

- 1. The chilled water system is operating at only 50% of its design capacity.
- 2. There is no temperature control of the system from the equipment room. The control panel does not give accurate readings of the cold supply air temperature or of the cutside air temperature therefore the 3-way valves controlling the chilled water to the air handling units are maintained at full-open position.
- 3. There is little that can be done to the existing chilled water system to supply more cool air to the building. The quantity of chilled water now being supplied to the air handling units is 17% greater than the original design flow, yet the load on the coils is 17% less than the original design load. The main problem is the high temperature of the air entering the coil caused by the high percentages of outside air as

discussed in the "Air Balance" section of this report. The higher the entering air temperature the greater the bypassed air load and higher the temperature of the cooled air leaving the coil. These combine to give a higher cold supply air temperature.

- 4. The flow and head on the pump manufacturer's curves for the chilled water pumps indicates that the flow and head for chiller No. 2 follow the curve characteristics, while for chiller No. 1 either the flow or the head are in error, the probability being that the head is about 3 or 4 ft. greater than indicated. However, the flow and/or head readings for chiller No. 3's chilled water pump are very much in error. At the flow indicated, the head on the pump would have to be about 100 ft. and at the head indicated the flow would 2050 GPM.
- 5. Readings indicate that the building return air is approximately 81°F dry bulb when the outside air is 95°F dry bulb. Readings taken at various return air dry bulb temperatures indicate a consistent relative humidity of approximately 50%. Using mixture temperatures, the percentages of outside air being mixed with return air at the relief dampers and at the air handling unit plenum can be calculated. Taking the outside air design temperatures of 95°F dry bulb and 78°F wet bulb and locating this and the mixture points on a psychrometic chart (See Psychrometic Chart I thru V in Appendix B), together with the rise thru the air handling unit, we can determine the entering conditions of the cooling coil. The leaving conditions of the air from the coil Part I page 6

can be had from the main cold duct temperature readings which are known to be near saturation.

E. CONCLUSION AND RECOMMENDATIONS

The chilled water system is operating at less than full flow because there appears to be more head in the system now than the original design. This could possibly be the result of the installation of a reverse return chilled water loop that added some 200 lineal feet of piping and its attendant friction loss. We are not getting full capacity from the chiller because of reduced flow.

We recommend the alterations to the chilled water piping and/or pumps to bring the system up to the original design flow of the chillers.

AIR CONDITIONING

AIR BALANCE

A. DESIGN

The air system serving the building consists of five built-up air handlers, designed to ultimately supply a total of 427,000 CFM. The original design called for a maximum of 90% of the supply air to be returned from the building to the air handlers, the remainder being made-up from outside air.

The air is returned to the air handlers by eight 40,000 CFM return fans which discharge into a common return plenum and one 85,000 CFM return fan (No. 21) originally designed to discharge directly into the return plenum of air handling unit No. 5 or exhaust according to outside air conditions. This is a total of 405,000 CFM. The outside air intakes of all five air handlers have modulating motorized dampers operating in conjunction with dampers on the return air intakes to the air handlers. These dampers can modulate to 100% outside air when the outside air temperature warrants. The main return air plenum has modulating motorized relief dampers operating in conjunction with the outside air-return dampers.

The air not returned to the air handlers is exhausted from the building thru locker room toilet and kitchen areas for the most part by exhaust fans. Total exhaust was originally designed for 43500 CFM.

Part I page 8

In addition to the five large-capacity air handlers there are three smaller air handlers designated AHU-2E, AHU-4SE, and AHU-2G. Combined they were designed to ultimately deliver 40,000 CFM and return 35,400 CFM of that air, the remainder made up by outside air.

In summary, the original ultimate design of the building was to receive 467,000 CFM of conditioned air, with a total return air of 440,400 CFM and an exhaust system of 53,400 CFM. This would leave the building under a negative pressure, the deficiency being 26,800 CFM.

B. MODIFICATIONS TO DESIGN

Air handling units nos. 2, 3, & 4 were originally installed with sheaves that reduced their capacities to 55,000 CFM, 52,000 CFM and 54,000 CFM respectively.

Return air fan No. 21 serving air handling unit No. 5 exclusively was revised to exhaust all it's air regardless of outside air conditions. There is no record of changing the capacities of the eight 40,000 CFM return fans. The modifications above would result in the following conditions:

Supply to building = 371,000 CFM

Return from building = 355,400 CFM

Exhaust from building = 141,400 CFM

The negative pressure of the building would thus be greatly increased, the deficiency increasing to 125,800 CFM.

It is difficult to imagine a structure with so few windows under this great an air imbalance; it may be that we do not have access to all the modifications performed during the period of occupancy.

C. CURRENT CONDITIONS

The five built-up air handling units are currently delivering 266,000 CFMS of conditioned air to the building which is approximately 80% of the installed capacity.

The eight return-air fans are returning a combined total of -80,000 CFM which is only 25% of the design capacity. The exhaust fans are exhausting a total of 108,000 CFM which is approximately 75% of the installed capacity.

Excluding the smaller air handling units, the building now has a positive pressure, the excess amounting to 78,000 CFM.

D. OBSERVATIONS

- 1. Air-handling Units Nos. 3,4, & 5 total static pressures exceed ultimate design static pressures. At the same time the fan RPM of these units was close to design while the actual horsepowers were 60% to 80% of their ultimate design maximum horsepower.
- 2. Air-handling Unit No. 1 is operating at its design static pressure and design RPM but it's horsepower is 80% of design.
- 3. Air-handling Unit No. 2 is operating at 75% of ultimate design static pressure and 80% of ultimate design from RPM and 50% of ultimate design horsepower.

Part I page 10.

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

- 4. Return air fans No.s 15 & 19 are not being operated due to complaints of excessive noise and vibration in certain spaces in the building.
- 5. Return air fans Nos. 13, 14, 16, 17 & 18 static pressures exceed design by 17% to 33% while fan RPM are at design and horsepowers are 50% to 70% of design.
- 6. Return fan No. 20 static pressure exceeds design by 20% while fan RPM is 95% of design and horsepower is 60% of design.
- 7. All modulating dampers are inoperable. Return air dampers are in the full open position. Outside air dampers are all approximately 30% open. Relief dampers are in full closed position.
- 8. All return fans, with the exception of No. 16, have negative static pressure readings at the fan discharge and No. 16 is only +.06".

 All return fans have a negative static pressure at the fan inlet which is in excess of the design static pressure. This condition was corrected when the boxes were cleaned.

E. CONCLUSIONS & RECOMMENDATIONS

- 1. The return air fans appear to be a major cause of air imbalance which can cause insufficient cooling, and inefficient heating.
- 2. Return fans are the major source of noise and vibration. The noise problem appears in the ductwork above certain spaces in the building. This should be investigated and corrected.
- 3. All return fans are operating at higher than design static pressures. As the static pressures at the fan inlets already exceed design, and there is only a short run of straight duct between the fan inlet and the point where the duct leaves the building, the problem must be within Part I page 11

the building. Dirt-clogged return-air boxes were one of the main problems. These boxes have been cleaned. The velocity and static pressure readings taken before the boxes were cleaned (July readings) and the readings taken after the cleaning (September readings) are shown in Appendix D.

4. Considering that the air handling units are not operating at ultimate capacity, the pressure drops of the air thru the spray chamber, the eliminators and the cooling coil sections appear high. The coil face velocities are 400 FPM or less and all were designed for 500 FPM. At 500 FPM pressure drops thru the section should not exceed one inch while readings indicate drops of 2-1/2 to 5 inches. These areas were not checked for physical conditions because inspection would have required unit shutdown. It appears the coils are in need of cleaning and repair.

AIR CONDITIONING

HEATING SYSTEM

A. DESIGN

STATINTL

High pressure steam from the central system is fed to pressure reducing stations. Low pressure steam (5 psi) from the reducing stations serve the preheat and reheat coils of each air handling unit. Two preheat coils for each air handling unit are installed one behind the other. The first preheat coil is designed to heat the mixture of return and outside air from 0°F to 40°F and the second preheat coil is designed to heat this air from 40°F to 80°F. These coils function during the winter months only.

The reheat coil for each air handling unit is located in the main hot air duct downstream of the cooling coil and is designed to heat a varying amount of air from 40°F to 85°F. This coil receives part of the air leaving the cooling coil and must operate on a year-round basis.

B. MODIFICATION - NONE RECORDED

C. CURRENT CONDITIONS & OBSERVATIONS

Only the reheat coils of the air handling units were functioning during the period when these observations were taken. There are many leaks in the low pressure steam piping in the equipment room. This is the major source of water damage to the insulation and for the large areas of water on the floor. The following are the main hot duct temperatures when the outside air is at design summer conditions of 95°FDB and 78°FWB. The original hot duct design air temperature was 85°F:

Part I page 13

Air Handling Unit No.	Hot Duct Temperature (°F).	Temperature Rise Across Reheat Coil (°F)	
1	81.0	24.0	
2 ,	74.5	18.0	
3	101.0	43.5	
4	62.5	0.0	
5	90.0	23.5	

The percentages of hot supply air to the total supply range from 28% to 55%.

D. CONCLUSIONS AND RECOMMENDATIONS

- 1. The reheat coil on air handling Unit No. 4 is obviously not functioning. With the supply air temperature being as high as it is the space served has probably not experienced any uncomfortably cool conditions.
- 2. The large percentage of hot air being supplied to the building would seem to indicate that the quantities of cold air are more than sufficient. There is also the possiblity that the mixing boxes in the building are not functioning or that the hot side of the mixing boxes leak profusely. The situation should be investigated and if the mixing boxes are at fault the quickest and most economical way to increase the cooling capacity would be to lower the set point temperatures on the hot decks to about 70%F.
 - 3. There were no preheat coil readings taken because all readings

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

were taken during the cooling season. Preheat coil readings would not be very meaningful in that the coils are sized for 100% outside air and this operational position is impossible to obtain with the control in their current condition.

Part I page 15 A

May 1970

AIR CONDITIONING

CONTROLS

A. DESIGN

The equipment in the equipment room is monitored and in part controlled from a central control panel housed in a room overlooking the equipment room. It is manned around the clock.

The panel includes indicators for chilled water and, (1) condenser water flow; (2) miniature START-STOP pushbutton stations and indicators for the pumps, air handlers, and various fans; (3) central temperature and humidity-indicating equipment to indicate temperature variation outside control limits for the air handlers, outdoor conditions, and selected spaces within the building; (4) remote temperature adjusters for the air handlers and the process water temperatures, (5) manually-reset alarms and silencing devices to indicate equipment shutdowns or dangerous temperatures, humidities or "no-flow" for process water lines, outside air conditions, roll filter runouts, and selected spaces in the building.

B. CURRENT CONDITIONS

Indicating instruments are out of calibration.

Indicator lights on many of the START-STOP pushbutton stations on the panel are not functioning.

C. CONCLUSIONS & RECOMMENDATIONS

The control panel does not accurately indicate that any piece of equipment is operating and if it is operating whether or not it is functioning properly.

It is recommended that all control equipment connected to the central control panel be checked, cleaned, calibrated, replaced, or repaired, and that this work be immediately performed by the manufacturer of the installed controls.

TAB

SECTION 1

PART II

PROCESS WATER SYSTEMS

A. DESIGN

The original design called for a de-ionized water system and a filter water system. Each system supplied three water temperatures: cold (45°F), ambient (68°F), and hot (145°F).

<u>Filtered System - Hot</u> - Original design called for a steamto-water heat exchanger to heat 44 GPM from 60°F to 145°F using 1900 lbs/hr of 5 psi steam.

<u>Filtered System - Cold</u> - Original design called for a water-towater heat exchanger to cool 83 GPM of city water to 45°F using 35°F brine solution from a separate process water chiller. This chiller was not installed.

<u>De-ionized System - Hot</u> - Original design called for a steam-towater heat exchanger to heat 28 GPM from 60°F, to 145°F. using 1200 lbs/hr. of 5 psi steam.

<u>De-ionized System - Cold</u> - Original design called for a water-towater heat exchanger to cool 95 GPM of city water to 45°F. using 35°F. brine solution from a separate process water chiller. See "Filtered System-Cold" for actual chiller installed.

Both the filtered and de-ionized ambient water temperatures are maintained by thermostatically-controlled mixing valves.

Part II page 1 .

B. MODIFICATION TO DESIGN

The de-ionizing equipment was abandoned in place leaving two systems of filtered water. In order to differentiate between the two systems, we shall continue to refer to the original de-ionized system as "de-ionized water".

A 125-ton chiller was installed to supply 146 GPM of 45°F. water with the water entering the chiller at 65°F. The process-chilled water pump was designed and installed for 265 GPM. The head varies because the use of these systems was sporadic, circulating return lines and pumps were installed on the cold and hot lines of both systems.

C. CURRENT CONDITIONS

Examination of Charts XI A & B in Appendix E show almost constant unchanging flow.

Examination of Charts V thru X in Appendix E show the temperatures of the return circulating lines for the process cold water much higher than when they leave the heat exchanger. Similarly the temperatures of the return circulating lines for the process hot water are much lower than when they leave the heat exchanger. The process ambient lines temperatures are too low.

The process water chiller also serves air handler 2E when the building system chilled water temperature rises too high.

D. CONCLUSIONS & RECOMMENDATIONS

- 1. The high cold water and low hot water return temperatures indicate crossover connections of the two systems within the building. This must be corrected before the working capacities of the heat exchangers can be determined.
- 2. The ambient lines can be balanced to give the design temperature of $68^{\rm o}{\rm F}$. This would also send more cold water to the $45^{\rm o}{\rm F}$. systems.
- 3. The almost constant unchanging flow shown on the Flow Meter Chart indicates that the taps in the building are left running constantly. There is no need for this as the hot and cold lines have recirculating lines with pumps.
- 4. The dilution facility will need further study after the crossover problem is solved. At the present time the dilution tanks are
 acting as reservoirs only because of the excess water passing thru the
 system.

PART II

COMPRESSED AIR

A. DESIGN

The original design called for three separate pneumatic systems:

- 1. Control Air for temperature control system
- 2. Process Air for building distribution system
- Compressed Air for pneumatic tanks to supply pressure for fire fighting sprinkler system.

<u>Control Air System</u> - The original design called for two separate compressors with storage tanks that are headered.

<u>Process Air</u> - The original design called for two separate units that are manifolded to feed a distribution header for various uses in the building.

<u>Preumatic Pressure Tanks</u> - To supply pressure in the sprinkler fire protection system are supplied air from two compressors that are manifolded.

B. MODIFICATION TO DESIGN

The installations are substantially as designed. Two compressors have been replaced due to ware and alternators were installed on the two control air compressors and two process air compressors.

C. CURRENT CONDITIONS

The systems operate the intervals indicated in Appendix D.

D. OBSERVATIONS

1. The compressed air systems are operating satisfactorily and appear to meet the building needs. This conclusion is drawn from Part II page 4
May 1970

the appareant maximum 25% operation that was observed on several occasions at the site during normal working hours. Accepted design practice in compressed air system design allows a 50% operational time.

E. CONCLUSIONS AND RECOMMENDATIONS

The compressed air systems in this building require a maintenance program for equipment that operates around the clock. The compressed air systems should be tied together thru pressure reducing valves for emergency cross-over operation should any compressor fail and be off line for an extended length of time.

TAB

SECTION 1 PART III

ELECTRICAL

A. GENERAL SYSTEM DESCRIPTION

- (1) Electric power is supplied to this facility by three (3)
 13.2 KV primary feeders through metalclad switchgear equipment containing air circuit breakers. These primary feeders have been newly reworked and modified by the power company.
- (2) Distribution of the primary power is by means of 15 KV interlocked armored cable in open ladder racks to three (3) banks of three (3) 750 KVA network type transformers. Each primary feeder supplies one transformer in each bank for one future transformer.
- (3) Each transformer in the system is rated 750 KVA, 13.2 KV Delta to 277/480-volts WYE. Each is equipped with a 1200- ampere indoor type network protector.
- (4) Three banks of transformers each form a spot network system feeding a 480-volt draw-out switchboard for local distribution. The connection between transformers and switchboards is by means of 1200-ampere, 3-phase, 4-wire enclosed ventilated bus duct. There are no main circuit breakers on any of the switchboards. The neutral of each transformer is brought out and connected to the low voltage switchboards.

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

- (5) The switchboards are designated as follows:
 - (a) Switchboard Number 1. North End
 - (b) Switchboard Number 2. Center
 - (c) Switchboard Number 3. South End
- (6) Switchboard Number 1 has three electrically operated air circuit breakers and serves:
 - (a) Motor control center number 1, with a 1200-ampere,3-phase, 3-wire enclosed ventilated bus duct.
 - (b) North end lighting riser with a 1200-ampere, 3-phase 4-wire totally enclosed bus duct.
 - (c) North end power riser with a 800-ampere, 3-wire totally enclosed bus duct.
- (7) Switchboard Number 2 has three electrically operated air circuit breakers and serves:
 - (a) Motor control center number 2 with a 1200-ampere,3-phase, 3-wire enclosed ventilated bus.
 - (b) Two power risers for the building center each with a 800-ampere, 3-phase, 3-wire totally enclosed bus duct.
- (8) Switchboard Number 3 has four (4) air circuit breakers three electrically operated and one manually operated air circuit breakers and serves:
 - (a) South end lighting riser with 1200-ampere, 3-phase,4-wire totally enclosed bus duct.

- (b) South end power riser with a 800-ampere, 3-phase, 3-wire totally enclosed bus duct.
- (c) Motor control center Number 3 with a 1200-ampere, 3-phase, 3-wire enclosed ventilated bus duct.
- (d) Motor control center 3a (added later) with a cable feeder consisting of 2 parallel legs of 500 mcm per phase. (See one line diagram).
- (9) In addition to this 480-volt distribution system, certain loads in the facility are served from a 208/120 volt switchboard supplied by a 2300 volt feeder, which was the original equipment in the building. This low voltage substation also serves loads in building 216. Certain loads presently being served by this switchboard are being transferred to Substation No. 2 under other modification contracts now in progress.

C. OPERATION AND CONDITION:

- (1) During our investigation, certain repairs to the 13.8 KV primary incoming service were being made. One primary feeder was not in service. This condition made one transformer in each bank dead. The facility was operating with only 2/3 of its transformer capacity available. It is now totally in service. The adequacy of the primary system is obvious.
- (2) During the time of our investigations a contractor was installing bus insulation in all of the secondary 480 volt switch-boards by means of taping and spraying.

II METHOD OF PROCEDURE:

A. Data Desired:

- (1) Since it was determined that the primary distribution system and transformer banks could carry the entire facility on 2/3 of capacity for an indefinite period there is no question of overall adequacy, therefore tests were limited to determinations of secondary distribution usage. The primary relays had recently been recalibrated.
- (2) We are to determine if each secondary feeder is carrying its share of the total load. The following data was collected for each outgoing secondary feeder at the low voltage circuit breaker load bus:
 - (a) Kilowatts of power.
 - (b) Amperes of current flowing.
 - (c) Phase voltage.

All readings were taken continuously over a 72 hour period of a normal working week by means of recording instruments. Measurement periods started and ended at midnight between Monday and Friday. The 72 hour of continuous measurement in our opinion, permits enough time for all normal operations within the facility to occur at least once. An operation which does not start or end at least once every 72 hours of working time will not be a significant normal operating function.

B. Data Collection:

(1) Each outgoing feeder from the 480 volt secondary switchboards was metered separately one at a time for 72 hours.

- (2) The meter charts were collected and analyzed for power consumption (maximum current flow compared to rating). Fluctuations in current, voltage and power were noted and analyzed and the power factor computed from the meter readings.
 - (a) Power factor is computed by the following method. $P = 3 \text{ E I Cos } \emptyset$

 $\cos \phi = P/3EI$

P. = KW from meter

E = Voltage from meter

- I = Current (high phase) from meter computed at
 max. and min. loading.
- (3) An independent testing company was retained to furnish, install and read current transformers and meters on the feeders. They also furnished preliminary analysis of meter charts to screen extraneous information. This testing company also made repairs to the switchboard bus insulation required due to damage incurred in the installation and removal of instrument transformers. The foregoing was done under supervision.

C. Results

- (1) All 480 volt secondary feeders have been measured.
- (2) Examination of the test results indicate light loads on all building power risers which would indicate that overloading problems reported at certain points within the facility are internal distribution problems, local in nature. The solution to such problems would require investigation at the site of the trouble.

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

- (3) Test results for power feeders for a 72 hour period are as follows:
 - (A) Switchboard Number 1 Power Riser
 - (a) Normal working hour loading
 ie Pick up at 7:30 am
 Drop off at 4:30 pm
 Peak loading 1:20 pm approximately 50 amperes
 See appendix tilted 480 volt feeder load characteristics.
 - (b) This load is characterized by voltage fluctuation from 475 to 460 volts. The voltage is pulled down at starting time ie 8:00 am
 - (c) The peak load on the feeder was approximately20% of rated capacity.
 - (B). Two power risers from swtichboard Number 2 for a 72 hours period indicate:
 - (a) Normal working hour loading.
 - ie Pick up at 8:00 am
 Drop off at 4:30 pm
 - (1) Although loading is fairly constant during the day, peak loads occured between 3pm and 4pm each day, but these peaks did not vary appreciably from steady state loading. Minimum loading on these feeders occured at 1:00 am.

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

- (b) Load on riser number 1 is characterized by heavy starting inrush at pick-up time indicating that local power equipment is served.
- (c) Peak load on these feeders during the test period did not exceed 20% of their rated capacity. The power was fairly constant at 0.91.
- (C) Switchboard Number 3 Power Feeder
 - (a) Pick up at 7:00 am

 Drop off at 3:30 pm
 - (b) Peak loading 100A 10:10 am

 Minimum loading 35A 6:30 pm

Maximum apparant usage about 12-1/2% of capacity.

- (D) Lighting and Motor Control Center feeders are more heavily and more uniformly loaded.
- (E) The conclusions which may be drawn from the foregoing is that additional power required within the building may be taken from the existing power risers.

III CONCLUSIONS

A. General

(1) Each transformer bank provides 2250 KVA of total capacity at 480 volts ie about 2800 amperes of total capacity.

B. Switchboard Number 1

Power Riser Peak Load 96 KW Pf 0.76 Lighting Riser Peak Load 405 KW Pf 0.96

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

Motor Control Center Peak Load 352 KW Pf 0.91

Total Peak Load 853 KW

Average power factor

0.88

KVA utilized 970 FVA

Percentage of capacity utilized 970/2250 = 43%

C. Switchboard Number 2

Power Riser #1 Peak Load 80 KW Pf 0.91

Power Riser #2 Peak Load 80 KW Pf 0.91

Motor Control Center Peak Load 484 KW Pf 0.86

Total Peak Load 644 KW

Average Pf 0.9

KVA Utilized 716 KVA

Percentage of capacity 716/2250 = 33%

D. Switchboard Number 3

Power Riser	Peak Load	64 KW	Pf 0.8
Motor Control Center	11 11.	465 KW	Pf 0.91
Motor Control Center	tt 11	8 KW	Pf 0.91
Lighting Riser	11 17	380 KW	Pf 0.99
То	tal Peak Load	917 KW	
Δ37	erage Pf	0.9	

KVA utilized 1020 KVA percentage of capacity 1020/2250 = 45.2% (see appendix).

Part III Page 8

IV OBSERVATIONS

A. Lighting

- (1) Overhead lighting in the Utility Building is served from the 280 volt emergency system. (ie Failure of this system puts out all lights in Utility Building).
- (2) Battery operated emergency lights are located throughout the Utility Building however, these are served by the 480 volt system.
- (3) Failure of the 480 bolt system will light these lights but at that time all overhead lights remain on and the battery lights are unnecessary. (Most of them failed on test therefore they should be tested and repaired or replaced). Failure of the 280 volt emergency system will turn off overhead lights but will not light battery lights. We would suggest reconnecting battery lights to emergency source so that they will function during the time of lighting failure.

B. Emergency System (208V)

- (1) The substation serving this system is quite old and therefore we would question its reliability. It serves, in addition to emergency lights and several miscellaneous highly critical areas in the facility loads in other buildings in the area. We would suggest providing one of the following:
 - A new 2300/208/120 volt primary cubicle, transformer and switchboard to serve only the subject facility.
 - 2. Transfer the building loads presently served by this system to switchboard number 2 and divorce the facility from the 2300-volt system.

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

(a) The transfering of one highly critical building load from this switchboard to 480 bolt switchboard No.2 is comtemplated at present.

D. Dust:

(1) The enclosed ventilated bus ducts between transformers and switchboards and between switchboards and motor control control centers run below a grating floor and are subject to dust accumulation and trash dropping through the grating. We suggest replacing these buses with totally enclosed type.

TAB

SECTION 1

PART IV

MAINTENANCE AND SPARE PARTS

A. INITIAL OPERATION

The preventative maintenance (PM) was instituted by the GSA group when the construction modifications were completed. We do not know what specific frequencies were established or are currently being persued as we were unsuccessful in obtaining a copy of the PM guide for this building.

B. MODIFICATIONS TO INITIAL OPERATION

We have no firm statistical data to prove the following, but feel an in depth analysis of repairs and maintenance for the past six years would validate our opinions:

- 1. The original frequency schedules that were used were probably for a normal government type office building.
- 2. These schedules have been slowly modified as trouble has appeared because the equipment (fans for instance) never shut down except for maintenance.
- 3. The PM program is tied directly to funding. Increases in frequency schedules require additional funds.

C. CURRENT CONDITIONS

The GSA group forces have done a miraculous job. They have provided on call service at all hours and for all types of problems even though they have limited personnel, funds and practically no spare parts.

Part IV page 1

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

The building is beginning to experience the effects of age (six years plus) and constant use, especially on high speed rotating equipment.

A failure of almost any piece of large equipment or part can cause a curtailment of activities within the building because the time required to find replacement parts and personnel to accomplish the repairs. Sometimes outside subcontractors must be brought in because group forces are too busy and/or spread too thin. They have to maintain several other buildings in the as well asTARINTL building.

GSA trains their operational personnel in the maintenance and repair of equipment and subsystems. If these people were to stay for an extended period in one location, this approach would be satisfactory. The attrition of personnel who by virtue of growth in training and experience are granted grade increases and transfers keeps a constant flow of new inexperienced people attempting to operate a complicated system with many intricacies. Unfortunately, by the time they have been thoroughly indoctrinated, they usually are transferred.

The present control system is so out of calibration, and working order that any change or modification to the airconditioning system does not make sense in that we have watch engineers attempting to control with devices that are incapable of controlling. Many are disconnected.

Part IV page 2

The building refrigeration system has recently been taxed beyond its capability because of the problem of dirty return air that clogged the high velocity return air boxes over a period of six years. This came to light when the return air fans were checked for capacity and static pressure and the return air system was found to be operating at less than 25% of its rated capacity. The buildings operational personnel tried to overcome this problem in various ways, some of which only ultimately served to compound the problem. (They did not run two return air fans at the request of the building tenants because of the noise and vibration on the third floor room was not tolerable).

There is essentially no visible major spare parts program for the building and therefore we are unable to comment except in Conclusions and Recommendations.

There are many recurring problems in the building, such as breaking of fan belts that could be prevented by a more comprehensive preventative maintenance program. The "FSA-PBS Office of Buildings Management Preventative Maintenance Guide" (See Appendix G) provides such a program when properly applied and when faithfully followed. However, the fact that this building is run on a around-the-clock, seven-day-a-week schedule requires that the current frequencies be reviewed and modified.

D. CONCLUSION AND RECOMMENDATIONS

The existing maintenance and spare parts program should be revised. The revision should be based on an in depth survey of the
current practices and an analysis of all previous repairs and replace-

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

ments to date since the building opened.

The analysis should be reviewed by the building tenant and GSA to establish the criteria for outages, shutdowns and overtimes, etc. The funding for spare parts and maintenance should be budgeted in advance on a schedule. The work forces should also be programmed.

Our recommendations for the building would be the reclassification of the building from general to special use so it could have its own maintenance staff on a basis of working only in this building and a complete inventory of vital spare parst.

Both of these items will cost money. The amount of money required, and the spare parts list are beyond the scope of this project.

TAB

SECTION I

PART V

SUMMARY

This survey is intended to furnish management with information for planning purposes as to utility growth capability.

The utility systems are capable of a 30% growth within the building provided an adequate PM program is accomplished and further provided that some internal adjustments are also accomplished. The following represents our estimates of the most urgent items in their order of priority. Bens 213.

Initiate a further study of utilities within the main building. \$80,000.00 Estimated Cost

2. Issue a time and material contract to the Company to calibrate, adjust, repair and replace the necessary controls in the utility room.

> Estimated Cost \$50,000.00

Initiate a program of vital stock spare parts.

\$60,000.00 Estimated Cost

The partial recirculating loop in the process water system should be traced and improper conditions corrected.

> Estimated Cost \$ 5,000.00

Replace the existing 208V emergency system.

\$ 3,000.00 Estimated Cost

Part V page 1

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

MPIC

Other areas that need attention, but that are difficult if not impossible to attach quantitive cost estimates, are the increase in the PM program by a frequency factor of 2 and maintain the same staff for this building at all times and reduce the attrition and rotation.

The building GSA people have programmed the funding for additional refrigeration capacity in the seventies for this building. We believe that this additional refrigeration capacity is not now necessary in that under corrected operational procedures, any two of the chillers installed should be able to hold building temperatures with its current use factor. The excess outside air that was drawn into the building machinery during the constriction of the return air system amounted to approximately one thousand tons increased airconditioning load that used the entire capacity of all three installed chillers.

Certain major equipment life expectancy must be shortened from normal standards because of the use factor. A pump can normally be expected to last 10 years with only normal seal maintenance. This type life is the result of experience over the years with equipment that operates some 3000 hours per year. This building operates 8700 hours a year and therefore it is our judgement, that all equipment will have a life expectancy of one half of that that might be normally expected.

The remaining life expectancy with normal maintenance that appears in appendix C was calculated in the following manor:

Part V page 2

Minimum Depreciation Period (as listed in the 1968 ASHRAE

Applications book, chapter 55) divided by a factor of two (for
the reason stated above) less seven years that the equipment has been
in service.

Example:

Chilled Water pump - 20 years minimum depreciation period.

Use one half life or 10 years because of continuous operation.

Subtract the seven years the system has been running. This

leaves three years remaining life expectancy. The pump,

motor, bearings and casings will undoubtedly last longer,

but repair and maintenance will increase rapidly.

TAB

SECTION 2


APPENDIX A

The temperature charts are only samples of total charts taken during test periods. The locations of the points where temperatures were taken are shown on the drawings in Appendix H.

Σ		Ар	prov	ed Fo	r Re	ease	200	1/07/	/12 :	CIA-F	RDP7	8-0 5 7	32A	0001	0050	9001-	9			<u> </u>		
1										ļ	ω											ļ.,,
				8	eracouple as social	hand to the affilial flavorities		 					8		tag is taranggagers; sa	1						C
1				-		}	-			į	<u> </u>											Ť
1																						
				L				ļ		1										J		-
	. •	ely :: e1	. +	TOT	+4 5					•\$. 4			ļ		_
	4	· +		ြတ္တ					*			<u> </u>	ര്	+ +	* *	4	F	7	-	\$ ~ \$	 	Ö
P ₽	우 5	우 -	9 7	*		0	0+	Q+ + 1	91.4	F	. 	₽	₽ ₽	<u></u>		우 우	우	유	<u>유</u> 우	우	후 <u></u>	9
+ 4 + 6 0 6+	ეთ * ¢	, 4 .	တ္ တဲ့	7° ф	တ္သံုတ္	တို့ကို တို့	2 m +	0 P P	La de	တ္ကု ကို ကို ကို ကို	6+ 6+ 6+ 6+	227	F + +	ာက္ ကိုက္မာ့က္	1 3 to 4	2 4 7	ညီတာက (F F	\$ t- 5 7	* * * *	7 4	7
cotts an			φ. γ. φ	A 5 13	chity &	နီး ထို မွန် ရီး ကန်း	(1) (4)	್ಷ್ಯಾಸ್ಟ್ ಫ್	N PK	తీ ట్, తీస్త	φ + σ σ γ γ	off.	နှင့် နှင့် ကြွယ်ပြင်	6 8 4 4 6	A WALL	2 % @	M & CA	W	3 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	4 4 4	dit 0	1 α α α α α α α α α α α α α α α α α α α
		***	*	80	1			AND THE PARTY OF T		-	ye spanise.		ထွင်	4			L T				+ +	Ç
		******											w									u
/==		7-	7		ŧ =		Ŧ	***			†	= 3	=		7	7	7		3	₹ :	-	
	+ ∓		Ŧ	¥		7 7		Ŧ	=	-	7	*		7 7		=	7	7	₹		- ₹	Ŧ
NTAN				0					NA N								ļ	AN				-
ANT		**************************************		X	C. Charles Land Walls	And the second second			ANA				8			-		AN			promoter ten	ř
NST									NST									NST	L			<u> </u>
2 N									-ც	<u> </u>	1							္မ				-
RO		*****							S.		ļ			·				Š.				
Ė		organica Property				married and the	MAC-AMELINA.	Periodic Contract	E.	e mangank semany nan	TOTAL STATE OF THE	and the property of the	0	APPENDING A MICHIGAN	Junior Salaman, 12	- commence		- E	Market and the		es priestration	C
ENHE!	ر. پ پ کا	\$ 51.4 \$	တ ရ ပူသီး လျ	ည်း <u>န</u>	9 14 4	0 ± 0	ς 4 ω 4 9	7 4 6 4	N S	မှ မှု	2 4 5	5 th th	9 21 4	0 P 0	\$ 21. \$ 2	5 th 50 th	전 ⁴ 전	HNE 49	र्ज द ज	\$ 12 °C	\$ 5 5	21 4
E 2	*.	*	† .			* .			NHR!		* . * .	++	.	+ +	*			AH.	ļ <u></u>]	ļ*
٠,									S		ļ — —							. <u> </u>		ļ		ļ.:
EGREES				0					REE				0					REE	ļ	-		C
DEC				េល	V+	10-	- [I	DEC		1		20	A	HU	7-6)	DEC]		ß
				#	-1-c	דטכ	511	ÞE	AIR	IM.	TAK	Æ		H 7	- c:	いいて	41E	EA	112	NTA	KE	ļ
,					2-1	ZET	URL	LAI	וצ ו	DA.//	PE	25		#8	- 12	ET) TC L	\ A	112 7	$\supset A / A$	PE	200
					ļ <u>-</u>		·	ļ. ——		÷				.,		ļ						
Follow Companies	Security of Security		Sales Million aid an anni	4 Ö	;	FA			}	·		THE RESIDENCE OF THE PARTY OF	4	#19			<u>.</u>		i	ļ	· racastriatus	7
/					4-	FA	U I	D15	CF	MIS	SE			#10	- 1=	ムル		150	- HA	175	E	
					5-	H<>	γ·r.	שב	C //	LIA	D	SCT		3± 11	- F	てンエ	DE	212	11	TIL.	DE	٦٢
								l	ļ				· }{							j		i
	PA WARRANA	Needle Arthur a nucleur Needle	and British Corporat	30	<i>w</i>	CC/).	- -		-				္က	34-16		ا حد الرب				A PACE	DEC	מ' ב מ
1														EA							1	
		· · · · · · · · · · · ·								†			1-1-1	AME	51	DK	دی ا	F	=H/	4 R	<u> </u>	· · ·
				20.	5-80-55-1-1-10-1-10-1-10-1-10-1-10-1-1-10-1	and the second		d on the who	100000000000000000000000000000000000000		L		50.		**************************************	The Region And		-			-	C
				· 01		4->				di d	<u> </u>		N	A I	D	- 4	غ	2		<u> </u>		- 0
						1 ,	1	1	1	Erz	L		Ţ	ļ							1	<u> </u>
						CI	JA	125		I	i	[TE	/	PIEI	SV	10	121	53		
				0				ļ		ĭ	ļ		-0-	11	14/	169	2	:00) P1	M		_
		James Barrell	1 -					-					×			770					The state of the s	7
L :	PA		70		A	4		<u> </u>		ļ		•				<u> </u>	• <u>-</u>					ļ ļ
	· · · · · · · · · · · · · · · · · · ·	- 1.1-o.	I						1		<u> </u>			7/	14/	69	4	:00	P	M	1	<u> </u>
(i					က	· · · · · · · · · · · · · · · · · · ·		1	1		N			.,	· /			·	· ···· F · · · · · · · ·			·

5		, , ,	lppr	oved I	ork	eleas	se 20	01/07	/12 :	CIA-	S KD5	78-05)	YOOO.	1000	2000	1-9					
مَ											0											
Ž	ը <u>տ</u>	ıφ	τ ² τ ²	δOδ	đ.	y y	Ł Ł	Ę.	 Ն	t.	1.17	10 10	O									ò
	1805 at. 4" 4 PP4			<u></u>			Income territoria - and		ye mananer za	1		4	ξ,	f ¥	δ. δ.	ţ.	ழ ழ	δ 1	φ. -	t t	ស្ ។)
				-				ļ		<u> </u>												
		i						·		ļ						1			ļ 			
44	# # #_ #	*	\$ 4		3	47		1	7 7	**************************************		4 4	Ö	4	¥. \$	77	***	Commercial and the second	7 4	and the second section is a second section of the second section of the second section	45	Ç
	20	* T	***	\$ 0 <u>1</u>	33 -33		1	at the	**	\$ \$			1	25 C	\$ 43 43	(A) #	♣			. C.	# es.	. O)
Ţ	7 7	۳ +	7 7	\$ \$) 	3 3	+ E+ C4	1	£ +	t.	7 7	÷ 4	- 47 1	7 +	T ;	, 7 ¥		F -	+	£ +		なるよ
. Å	<u>~</u> ~	Q.	4 9	, çı	4 3	्र प्	۲ (φ φ	Ğl	ў ў		Ž,	Q Q	¢, (d d	약 작	Ç.	d Či	\$ \$	*	ry - 2
	ne seem unit			O_							manus construction of the	opens - 1 mass more	Q.	-			70 PM 421 4 W				Chyra 48.	င္က
				- CO							ļ		(C)									W
						ļ	ļ					ļ	•									
TAN	Sen ancers, nover-			0		arantarii tati			TAN				6					NTA.		-		2
CONSTANTAN		-	-	- 1					STAI		ţ		-1.3					ONSTAN				-
2 0 0			_				<u> </u>		- 0 - 0		<u>.</u>	-						ខ្ញុំ	1	ļ		
RON							ļ		RON								ļ	IRON				-
ENHEIT-IRON	-		er e consceri	ွ	-	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	-	-	H		aban o mun n		္မွ	-			- Justinors -	1 5	a consider remain			-0
E	P 9	φ	φφ	ဖု ဖု	\$	φ	$\phi - \phi$	φ	RENH	\$	g	9 . 9	φ (\$ \$	မှ မှ	Ϋ́	φφ	RĒNHE +6	φ	န္ န	φ	ç . ç
H.		1					-		FAHF]	ļ	ļ				FAH				-
<u> </u>		ļ							EES	+	-							EES				
EGREF	ARRENTS.		***	20	-	CHECK WINE CO.	P. SANGER STORY OF		DEGR			and the second	LO.					DEGF				30
Ω	<u> </u>					A	10	100	\$		- j											-1
	 	 -			++ 1	0)T (וכוונ	E V	11.5	IKIT	AKE	<u> </u>						1			1
			1	!	# 2		+						A.A		-	-		-				-0
	ļ											-	4		12E	SAL	7	I/AE	دے	LI.		4
					E #										RI	SH		AL	: دا	څاک	三	
]			# 4												-144	-]			-	
		1		0	# 5	1110	דכ	DE	JK.	MAI	n D	hc.	ĽŎ-			***************************************	***************************************	-			<u> </u>	ွှ
]	m	# 6	- 00	LD	DE	16 /	AIL	מו	ψζ٦	- (1)	.					1		1	
					ポ ア・	12	1 10		DE	CO1	77			+	_	-			-			1
	1				7-7		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\												_			
	-			9		1	1-1/		3	and the same			Q	· l. ·						PC	02	٠ <u>,</u>
<u> </u>					TE	//\	25	12/	\ T'	C) Ta	215	15-			_	-	_	_	<u> </u>	1,	1/1/2	
		<u> </u>			ī	1	7	1			15/	ł					-					
1		1				12	/ 6.	~~~		, 00	- (-		_		-			-			
									-				<u>Q</u> .							The second secon	-	
47	1		-		17,	115	160	1	4:	00	Pi	/								(A		
-	1	1	- -		- 60		1				· i ·		1			17/	(G) [- 6		>1= .		
	-	-			- - 4				-	1	RDP								-1			


		L A	prov	ed F	or R	eleas	e 200	1/07	/12 :	CIA-	RDP7	8-05	732A	0001	0005	0001	-9	The section of the se	Janes and the second				
					2												2 S						
•	Q	CH+	14145	65	200	2.00 c	400	17 6+ 1-1-6+	2 5		\$ \$\$\frac{1}{2}\$	\$ 14 St	\$ 24.7 27.5	\$ 1. T	4 6	67 C	# 4 # 4 3	****	<u>.</u>	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	2 t of	5	a
4	† ¥	4 69 F.	4 4	240.44	4 4	‡ ;	, 4	· · · ·	+ 	01 80	7.4	3	→ •	\$ 2 7 \$ 2 7	* 6. 6. 7. 0.6	* * C		-4	-	**************************************	4	± €	7+8+
4	ŏ	₹ ∓	7	† ; 	*	-	7		**	[∓] o [∓]	\$ \$	3 to	CS TA T		£		* *	G∯	¥ ₹ 106	* ***	 3, 4		4
۳ ب	ڻ ن پ		en + c	, e	φ ÷	4	di.	m m	. 69	ຸ້ດ	ů ±	72	, ç	r r	i	φ φ	7	2	္ က	en +	- F)	ů.	7) - (
24	ğ	ů ů	Ç,	4 6	t t	Q .	ů ů	ů ů	25	4 4	· \$ \$	2	Ç Ç	ş . Ş	çı	ф ф	V (5	й ф	4	1 7	ů.	Ç4
	8	100-100 mm	**************************************	PROTECTION OF STR			1500 000	O MARTIN COMPANIES COMPANI		80			to come constitution	200	ental rathments		* >======	a same de antique a	8		AND ADDRESS OF THE PARTY AND THE	de scanarias a	es sure
			And the second s																				
													7 - 70 - 7 - 100 - 10										-
73	6		and a subject of the		**************************************	ANTAN		-	Profesoration Production	2					ANTAN	aga grandent — ra	Secretaria de la constitución de		.0			, , , , , , , , , , , , , , , , , , ,	urene e
						CONST									ONST,								+
er F		\$ \$	\$ \$	\$	å. 4.	T-IRON (Ψ,	ရာ ရာ ရာ ရာ	45.46 44.6		95	နှင့် မှ	95	25 435	IRON C	2 1 2	\$ \$	ţ.	ရာ မှာ	95.4	ţţ.	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2) (4
e	0	e d'agrice de constitución de	a columnida acceptible.		- Andrews	NHELL		2 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 1		0			montre med		HEIT	enterfect de son de co			0	C. M.C. Mark Months	W. W. C.		
	· /		*** *** *** **** **** **** **** **** ****		-	FAHRE									FAHRE								-
	<u>ဂ</u>		1-1-() <u>-</u>	4	REES		,		0					REES				0				+
		1- c	רטכ	う!【	>E	DDEGREES	2 11	774	KE	ณ			XXXXXXXXXX		DEG				ល				
		1	Į	i .	K)/			1	513.	٠	<u> </u>								1				
-		12 11 11 12 12 12 12 12 12 12 12 12 12 1	Commence of the same of	the section of the	NT	Charles and the contract of the	CONTRACTOR SEC.	THE PERSON OF		Ö	CAL Tribute		of Calculate And Other					-s inchesos	6				
-		}			PIEC																and the state of t	ļ	
		<u> </u>	l	i	DE					1													
	ത		A Marie Control	to so a mesona	KE					င္က	P	EAT	5		(S C)U	1216	111	မ္က		OPE LE CONTRA		***
	**	- 12		<u> </u>	ļ			NJ. CT			i managera a	l		<u> </u>	2:			ſ	1				
	<u> </u>				U					0									0				
	ั้ง	1	=//	<f< td=""><td>गडा</td><td>SY</td><td>TU</td><td>121</td><td>3</td><td>, ผั</td><td></td><td>120</td><td>30</td><td>C>50</td><td>15</td><td>E1.</td><td>2</td><td></td><td>Ň</td><td></td><td></td><td> </td><td></td></f<>	गडा	SY	TU	121	3	, ผั		120	30	C>50	15	E1.	2		Ň				
		7	16	169	<u> </u>	2:	30	2				===	H/	(15.			.						
	Ò-			1	[[]					-6	100000 and 100000		S			********			2	M, M MANAGE			
		4	161	169) (10	30)			i					AF AP	PE	UV E	1X 3 c:	A	4	ļ	
-					12						ဖ						N						
}	0	}		.]			Land of the contracts		Lar roupes a	. 0]	1-10		1	**************************************	L. p		0			1	

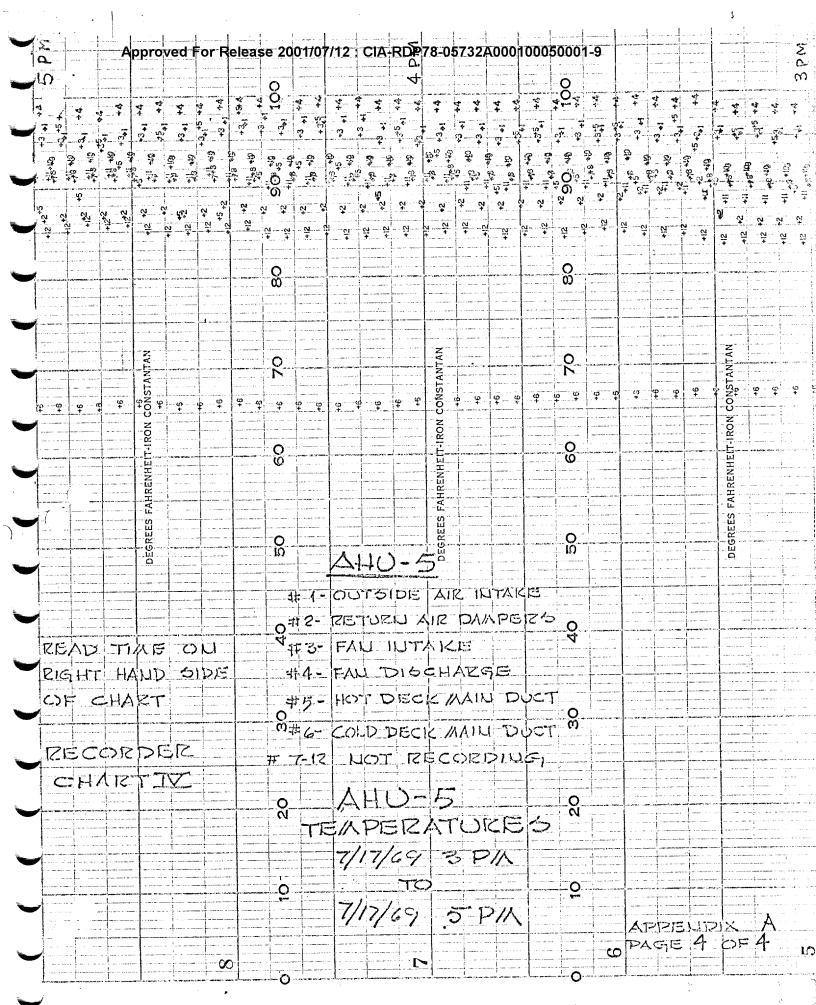


SECTION 2

APPENDIX B

'The psychrometric charts in this appendix indicate the various points and conditions the air passes thru in the large air handlers.

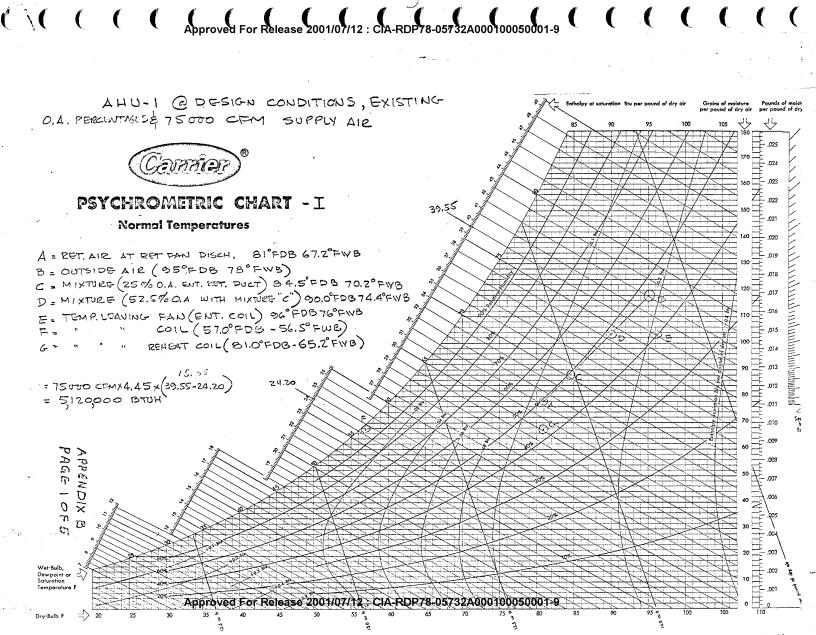

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

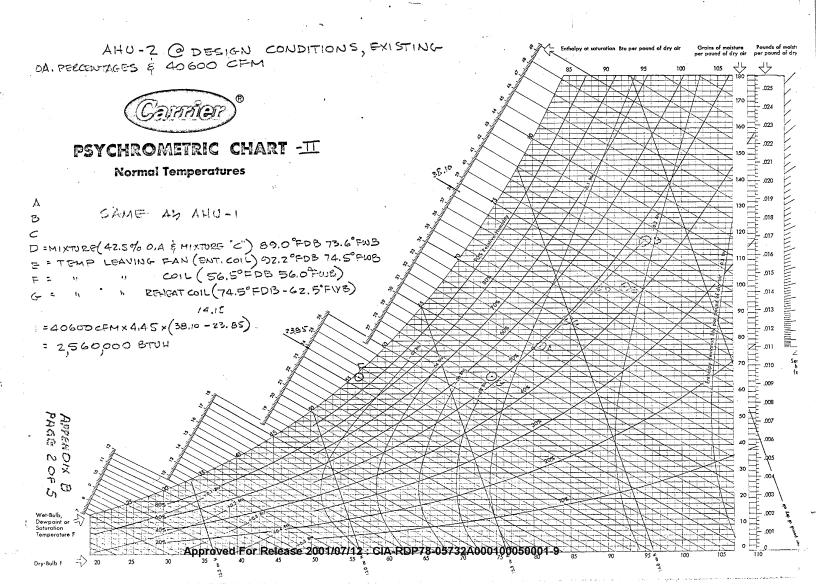


Approved For Release 2001/07/12 : CIA-RDP/8-05732A000100050001-9 AHU-3@ DESIGN CONDITIONS, EXISTING O.D. PERCENTAGES, \$35680 CFM PSYCHROMETRIC CHART -III Normal Temperatures SAME AS AHU-1 D : MIXTURE (39% O.A WITH HIXTURG"C") 88.6°FDB 73.2°FWB E = TEMP. LEAVING FAN (ENT. COIL) 93.4°FDB 74.7° FWB
F: " COIL 57.5°FDB 57.0°FWB . " REHEAT COIL (1010° FOB 715° FWB) = 35,680×4.45 × (38.25-24.50) = 2,180,000 BTUH PAGE 30F5 APPENDIX B Approved For Release 2001/07/12 CIA-RDP78-05732A000100050001-9


AHU-4 @ DESIGN CONDITIONS, EXISTING O.F.

PERCENTAGES & 52800 CPM

By 150 100 105 100

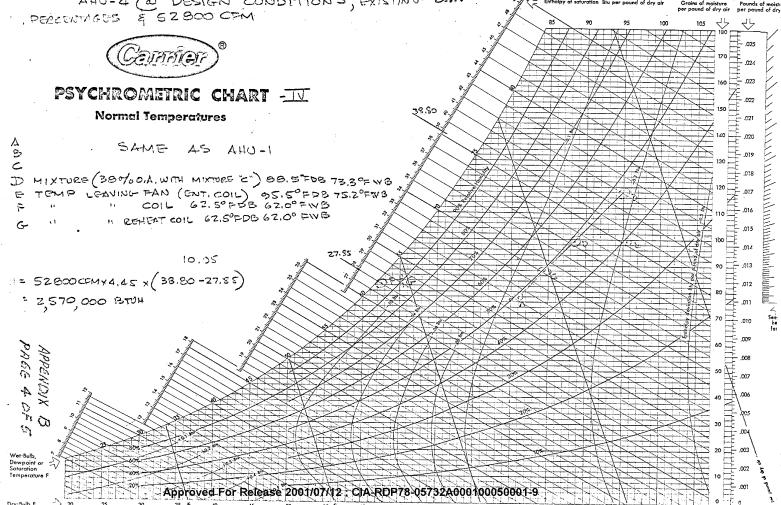

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

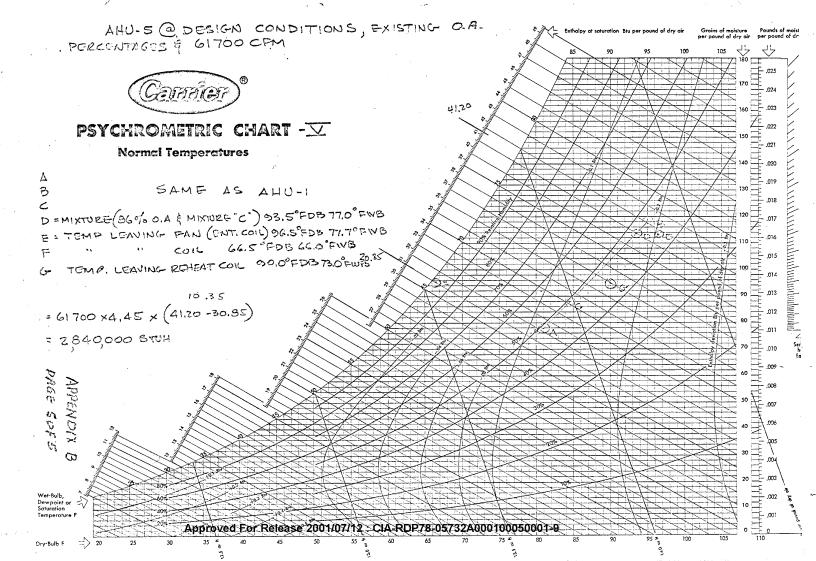

SECTION 2

APPENDIX C

The following 37 equipment reports indicate the major portion of the data that is pertinent to the larger items of mechanical equipment.

- 1. NAME: Air Handling Unit No. 1.
- 2. FUNCTION: To supply heated and cooled air to a high velocity dual-duct system.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure readings at various points in the equipment.
 - b. Simultaneous temperature readings at various points in the equipment.
 - c. Air velocities in main supply ducts.
 - d. Fan Motor RPM, running amps and voltage and fan RPM.
 - e. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 200 HP, 232 amps @ 440 volts 1180 RPM.
 - b. Shop Drawings: Fan 87000 CFM at 9-1/2" S.P. 1211 RPM 160.6 BHP.
 - Cooling Coil: Six sections 10'-10-1/2" x 3'-1-7/16" x 10" each 498 FPM @ 87000 CFM and .59" S.P.drop, 174.8 S.F. face area, entering air 82°FDB and 67.5°FWB leaving air 53.9°FDB (without sprays) and 53°FWB. 782 GPM of chilled water entering at 42°F and leaving at 52°F with 7.5 ft. press. drop thru coil. Total load 3,915,000 BTUH.
 - Preheat Coil: Face velocity of 520 FPM at 87000 CFM and .05 inches pressure drop. Air entering at 0°F and leaving at 40°F using 5 psig steam. Face area is 173.1 S.F.
 - Reheat Coil: Face velocity of 970 FPM at 43500 CFM and .20 inches pressure drop. Air entering at 40°F and leaving at 85°F. Face area 44.8 S.F.
 - c. Design: Filters Maximum internal pressure drop of 1".
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running. Vibrations at time of readings, indicate need for fan bearings replacement. Preheat coil was relatively clean and clear of obstructions. Reheat coil, cooling coil and sprays can be examined only when system is shut down. No belt guard at time of readings.

7. Life expectancy remaining 3 years.

- 1. NAME: Air Handling Unit No. 2
- 2. FUNCTION: To supply heated and cooled air to a high velocity dual-duct system.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure readings at various points in the equipment.
 - b. Simultaneous temperature readings at various points in the equipment.
 - c. Air velocities in main supply ducts.
 - d. Fan Motor RPM, running amps and voltage and fan RPM.
 - e. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 200 HP, 232 amps @ 440 volts 1180 RPM.
 - b. Shop Drawings: Fan 85000 CFM at 9-1/2" S.P. 1198 RPM 155.3 BHP
 - Cooling Coil: Six sections 10'-10-1/2" x 3'-1-7/16" x 10" each
 498 FPM @ 85000 CFM and .59" S.P. drop, 170.4 S.F. face area,
 entering air 82°FDB and 67.5° FWB leaving air 53.9°FDB (without sprays)
 and 53° FWB. 774 GPM of chilled water entering at 42°F and leaving
 at 52°F with 7.5 ft. press. drop thru coil. Total load 3,825,000
 BTUH.
 - Preheat Coil: Face velocity of 520 FPM at 85000 CFM and .05 inches pressure drop. Air entering at 0°F and leaving at 40°F using 5 psig steam. Face area is 169.2 S.F.
 - Reheat Coil: Face velocity of 950 FPM at 42500 CFM and .20 inches pressure drop. Air entering at 40°F and leaving at 85°F. Face area 44.8 S.F.
 - c. Design: Filters Maximum internal pressure drop of 1".
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running vibrations at time of readings, indicates need for fan bearings replacement. Preheat coil was relatively clean and clear of obstructions. Reheat coil, cooling coil and sprays can be examined only when system is shut down.

7. Life expectancy remaining 3 years:

- 1. NAME: Air Handling Unit No. 3
- 2. FUNCTION: To supply heated and cooled air to a high velocity dual-duct system.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure readings at various points in the equipment.
 - b. Simultaneous temperature readings at various points in the equipment.
 - c. Air velocities in main supply ducts.
 - d. Fan motor RPM, running amps and voltage and fan RPM.
 - e. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate; Fan Motor 200 HP, 232 amps @ 440 volts 1180 RPM.
 - b. Shop Drawings: Fan 85000 CFM at 9-1/2" S.P. 1198 RPM 155.3 BHP
 - Cooling Coil: Six sections 10'-10-1/2" x 3'-1-7/16" x 10" each 498 FPM @ 85000 CFM and .59" S.P.drop, 170.4 S.F. face area, entering air 82°FDB and 67.5°FWB leaving air 53.9°FDB (without sprays) and 53°FWB. 774 GPM of chilled water entering at 42°F and leaving at 52°F with 7.5 ft. press. drop thru coil. Total load, 3,825,000 BTUH.
 - Preheat Coil: Face velocity of 502 FPM at 85000 CFM and .05 inches pressure drop. Air entering at 0°F and leaving at 40°F using 5 psig steam. Face area is 169.2 S.F.
 - Reheat Coil: Face velocity of 950 FPM at 42500 CFM and .20 inches pressure drop. Air entering at 40°F and leaving at 85°F. Face area 44.8 S.F.
 - c. Design: Filters Maximum internal pressure drop of 1".
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running. Vibrations at time of readings, indicate need for fan bearings replacement. Preheat coil was relatively clean and clear of obstructions. Reheat coil, cooling coil and sprays can be examined only when system is shut down. No belt guard at time of readings.

7. Life expectancy remaining 3 years.

- 1. NAME: Air Handling Unit No. 4
- 2. FUNCTION: To supply heated and cooled air to a high velocity dual-duct system.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure readings at various points in the equipment.
 - b. Simultaneous temperature readings at various points in the equipment.
 - . Air velocities in main supply ducts .
 - d. Fan motor RPM, running amps and voltage and fan RPM.
 - e. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 200 HP, 232 amps @ 440 volts 1180 RPM.
 - b. Shop Drawings: Fan 85000 CFM at 9-1/2" S.P. 1198 RPM 155.3 BHP
 - Cooling Coil: Six sections 10'-10-1/2" x 3'-1-7/16" x 10" each
 498 FPM @ 85000 CFM and .59" S.P. drop, 170.4 S.F. face area,
 entering air 82°FDB and 67.5°FWB leaving air 53.9°FDB (without sprays)
 and 53°FWB. 774 GPM of chilled water entering at 42°F and leaving
 at 52°F with 7.5 ft. press. drop thru coil. Total load, 3,825,000
 BTUH.
 - Preheat Coil: Face velocity of 520 FPM at 85000 CFM and .05 inches pressure drop. Air entering at 0°F and leaving at 40°F using 5 psig steam. Face area is 169.2 S.F.
 - Reheat Coil: Face velocity of 950 FPM at 42500 CFM and .20 inches pressure drop. Air entering at 40°F and leaving at 85°F. Face Area 44.8 S.F.
 - c. Design: Filters Maximum internal pressure drop of 1".
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running. Vibrations at time of readings, indicate need for fan bearings replacement. Preheat coil was relatively clean and clear of obstructions. Reheat coil, cooling coil and sprays can be examined only when system is shut down.

7. Life expectancy remaining 3 years.

- 1. NAME: Air Handling Unit No. 5
- 2. FUNCTION: To supply heated and cooled air to a high velocity dual-duct system.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure readings at various points in the equipment.
 - b. Simultaneous temperature readings at various points in the equipment.
 - c. Air velocities in main supply ducts.
 - d. Fan motor RPM, running amps and voltage and fan RPM.
 - e. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 200 HP, 232 amps @ 440 volts 1180 RPM.
 - b. Shop Drawings: Fan 85000 CFM at 9-1/2" S.P. 1198 RPM 155.3 BHP
 - Cooling Coil: Six sections 10'-10-1/2" x 3'1-7/16" x 10" each 498 FPM @ 85000 CFM and .59" S.P. drop, 170.4 S.F. face area, entering air 76°FDB and 64.0° FWB leaving air 53.9°FDB (without sprays) and 53° FWB. 782 CPM of chilled water entering at 42°F and leaving at 52°F with 7.5 ft. press. drop thru coil. Total load 2,780,000 BTUH.
 - Preheat Coil: Face velocity of 502 FPM at 85000 CFM and .05 inches pressure drop. Air entering at 0°F and leaving at 40°F using 5 psig steam. Face area is 169.2 S.F.
 - Reheat Coil: Face velocity of 950 FPM at 42500 CFM and .20 inches pressure drop. Air entering at 40°F and leaving at 85°F. Face Area 44.8 S.F.
 - c. Design: Filters Maximum internal pressure drop of 1".
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running. Vibrations, at the time of readings, indicate need for fan bearings replacement. Preheat coil was relatively clean and clear of obstructions. Reheat coil, cooling coil and sprays can be examined only when system is shut down. No belt guard at time of readings.

7. Life expectancy remaining 3 years.

- 1. NAME: Fan No. 13
- 2. FUNCTION: To return air from the spaces served by the Air Handling Units to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 14
- 2. FUNCTION: To return air from the spaces served by the Air Handling Units to a common return air plenum.
- 3. FIELE DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 15
- 2. FUNCTION: To return air from the spaces served by the Air Handling Units to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWINGS DATA:
 - a. Nameplate: Fan motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 16
- 2. FUNCTION: To return air from the spaces served by the Air Handling Units to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S,P., 770 RPM, 35 BHP 2180 FPM Outlet Velocity
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 17
- 2. FUNCTION: To return air from the spaces served by the Air Handling Units to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan Motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP 2180 FPM Outlet Velocity
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 18
- 2. FUNCTION: To return air from the spaces served by the Air Handling Unit to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-yolts, 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 19
- 2. FUNCTION: To return air from the spaces served by the Air Handling Units to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 20
- 2. FUNCTION: To return air from the spaces served by the Air Handling Unit to a common return air plenum.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor RPM, running amps and voltage, fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 40 HP, 50-amps, @ 440-volts 1175 RPM.
 - b. Shop Drawings: Fan 40000 CFM @ 4" S.P., 770 RPM, 35 BHP 2180 FPM Outlet Velocity
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition. Belt guard not on at time of readings.

Life expectancy remaining 1 year.

EQUIPMENT Report Number 14

- 1. NAME: Fan No. 6 G.S.A. Shop
- 2. FUNCTION: To exhaust air from the areas:
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size.
 - c. Condition of equipment
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 7.5 HP, 9.5-amps, @ 440 volts 1750 RPM.
 - b. Shop Drawings: Fan 5000 CFM @ 3.5" S.P. 1374 RPM, 3.45 BHP
 Motor 5 HP 1800 RPM 440 Volt 3 phase 60 cycles
- 6. EQUIPMENT CONDITION:

The fan is running properly and as a weatherproof unit appears in good condition.

7. Life expectancy remaining 1 year.

May 1970 -.

- 1. NAME: Fan No. 7
- 2. FUNCTION: General exhaust
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size
 - c. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 5 HP 6.8-amps, @ 440-volts 1725 RPM.
 - b. Shop Drawings: Fan 7400 CFM @ 3.5" S.P., 1293 RPM, 4.84 BHP
- 6. EQUIPMENT CONDITION:

The fan is running property and as a weatherproof unit appears in good condition.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 8
- 2. FUNCTION: General Exhaust
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity.
 - b. Discharge size.
 - c. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 5 HP, 6.8-amps, @ 440-volts, 1725 RPM.
 - b. Shop Drawings: Fan 6000 CFM @ 3.5" S.P., 1243 RPM, 4.18 BHP
- 6. EQUIPMENT CONDITION:

The fan is running properly and as a weatherproof unit appears in good condition.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 9
- 2. FUNCTION: General Exhaust
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size
 - c. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 5 HP, 6.8-amps, @ 440-volts 1725 RPM.
 - b. Shop Drawings: Fan 6000 CFM @ 3.5" S.P., 1243 RPM, 4.18 BHP
- 6. EQUIPMENT CONDITION:

The fan is running properly and as a weatherproof unit appears in good condition.

Life expectancy remaining 1 year.

- 1. NAME: Fan No. 10
- 2. FUNCTION: General Exhaust
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size
 - c. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 5 HP, 6.8-amps, @ 440-volts 1725 RPM.
 - b. Shop Drawings: Fan 6000 CFM @ 3.5" S.P., 1243 RPM, 4.18 BHP
- 6. EQUIPMENT CONDITION:

The fan is running properly and as a weatherproof unit appears in good condition.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 11
- 2. FUNCTION: General Exhaust
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size
 - c. Condition of equipment
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 5 HP, 6.8-amps, @ 440-volts 1725 RPM.
 - b. Shop Drawings: Fan 6000 CFM @ 3.5" S.P., 1243 RPM, 4.18 BHP
- 6. EQUIPMENT CONDITION:

The fan is running properly and as a weatherproof unit appears in good condition.

Life expectancy remaining 1 year.

- 1. NAME: Fan No. 21
- 2. FUNCTION: To exhaust air from the spaces served by the Air Handling Unit No. 5.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Static pressure of fan
 - b. Air velocity
 - c. Fan motor, RPM, and fan RPM.
 - d. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 100 HP, 123-amps, @ 400-volts 885 RPM.
 - b. Shop Drawings: Fan 85000 CFM @ 4" S.P., 521 RPM, 75 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition.

7. Life expectancy remaining 1 year.

- 1. NAME: Fan No. 22
- 2. FUNCTION: To exhaust air from G.S.A. space
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size
 - c. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 1.5 HP, 2.6-amps, @ 440-volts
 - b. Shop Drawings: Fan 5000 CFM @ 1" S.P., 637 RPM, 1.2 BHP
- 6. EQUIPMENT CONDITION:

The fan and motor were examined only while running and appeared in good condition.

Life expectancy remaining 1 year.

- 1. NAME: Fan No. 23 Kitchen
- 2. FUNCTION: To exhaust air from spaces.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Discharge velocity
 - b. Discharge size
 - c. Condition of equipment.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 10 HP, 13.5-amps, @ 440-volts 1160 RPM.
 - b. Shop Drawings: Fan 12000 CFM @ 3-1/2" S.P., 1632 RPM, 9.5 BHP
- 6. EQUIPMENT CONDITION:

The fan is running properly and as a weatherproof units appears in good condition.

7. Life expectancy remaining 1 year.

- 1. NAME: Chiller No. 1
- FUNCTION: To supply chilled water to the cooling coils of the Air Handling Units.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Total chilled water flow
 - b. Temperatures of chilled water entering and leaving chiller
 - c. Total condenser water flow
 - d. Temperatures of condenser water entering and leaving chiller
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Design: 800 Tons Capacity
 1920 GPM of 42°F chilled water
 3100 GPM of 85°F Condenser Water
 Maximum pressure drop thru cooler = 15 ft.
 Maximum pressure drop thru condenser and absorber combined = 25 ft.
 440 volt.
- 6. EQUIPMENT CONDITION:

The solution pump has had problems. The seals need replacement too frequently.

7. Life expectancy remaining 3 year.

- NAME: Chiller No. 2
- To supply chilled water to the cooling coils of the Air FUNCTION: Handling Units.
- FIELD DATA TO BE ACQUIRED:
 - Total chilled water flow a.
 - Temperatures of chilled water entering and leaving chiller. ъ.
 - Total condenser water flow c.
 - Temperatures of condenser water entering and leaving chiller.
- FIELD DATA:

See Appendix D

- DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - 800 Tons Capacity Design: 1920 GPM of 42°F chilled water 3100 GPM of 85°F Condenser Water Maximum pressure drop thru cooler = 15 ft. Maximum pressure drop thru condenser and absorber combined = 25 ft. 400 volt.
- EQUIPMENT CONDITION:

The solution pump has had problems. The seals need replement too frequently.

7. Life expectancy remaining 3 years.

- 1. NAME: Chiller No. 3
- 2. FUNCTION: To supply chilled water to the cooling coils of the Air Handling Units.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Total chilled water flow
 - b. Temperatures of chilled water entering and leaving chiller
 - c. Total condenser water flow
 - d. Temperatures of condenser water entering and leaving chiller
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Design:

 748 tons capacity
 1790 GPM of 44°F Chilled water
 2760 GPM of 85°F Condenser Water
 Maximum pressure drop thru cooler = 8.1 ft.
 Maximum pressure drop thru condenser and absorber combined =
 32.3 ft. 440 volt.
- 6. EQUIPMENT CONDITION:

The solution pump has had problems. The seals need replacement too frequently.

7. Life expectancy remaining 7 years.

- 1. NAME: Chilled Water Pump P-1
- 2. FUNCTION: Circulating chilled water from Chiller No. 1
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Head pressure entering and leaving pump
 - b. Flow
 - c. RPM
 - d. Condition of equipment
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 50 HP 60 amps 440V 1760 RPM
 - b. Shop Drawings: 1920 GPM @ 75 ft. total dynamic head, 82% efficiency 50 HP 1750 RPM
- 6. EQUIPMENT CONDITION

The seals need normal maintenance.

7. Life expectancy remaining 3 years.

- 1. NAME: Condenser Water Pump P-2
- 2. FUNCTION: Circulating Condenser water to Chiller No. 1.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Head pressure entering and leaving pump
 - b. Flow
 - c. RPM
 - d. Condition of equipment
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 100HP 115 amps 440 V 1765 RPM
 - b. Design: 3100 GPM @ 85 ft. total dynamic head, 80% efficiency 100 HP 1750 RPM
- 6. EQUIPMENT CONDITION:

The seals need normal maintenance.

7. Life expectancy remaining 3 year.

- 1. NAME: Chilled Water Pump'P-2
- 2. FUNCTION: Circulating chilled water from Chiller No. 2
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Head pressure entering and leaving pump
 - b. Flow
 - c. RPM
 - d. Condition of equipment
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 50 HP 60 amps 440V 1760 RPM
 - b. Shop Drawings: 1920 GPM @ 75 ft. total dynamic head 82% efficiency 50 HP 1750 RPM
- 6. EQUIPMENT CONDITION:

The seals need normal maintenance.

7. Life expectancy remaining 3 years.

- 1. NAME: Condenser Water Pump P-2
- 2. FUNCTION: Circulating condenser water to Chiller No. 2
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Head pressure entering and leaving pump
 - b. Flow
 - c. RPM
 - d. Condition of equipment:
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 100 HP 115 amps 440V 1765 RPM
 - b. Shop Drawings: 3100 GPM @ 85 ft. total dynamic head 80% efficiency 100 HP 1750 RPM
- 6. EQUIPMENT CONDITION:

The seals need normal maintenance.

7. Life expectancy remaining 3 years.

- 1. NAME: Chilled Water Pump P-3
- 2. FUNCTION: Circulating chilled water from Chiller No. 3
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Head pressure entering and leaving pump
 - b. Flow
 - c. RPM
 - d. Condition of equipment
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 50 HP 62 amps 440V 1745 RPM
 - b. Design; 1800 GPM @ 90 ft. total dynamic head
- 6. EQUIPMENT CONDITION:

The seals need normal maintenance.

Life expectancy remaining 3 years.

- 1. NAME: Condenser Water Pump P-3
- 2. FUNCTION: Circulating condenser water to Chiller No. 3.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Head pressure entering and leaving pump
 - b. Flow
 - c. RPM
 - d. Condition of equipment
- 4. FIELD DATA:

See Appendix D . . .

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 100HP 119 amps 440V 1775 RPM
 - b. Design: 2800 GPM @ 95 ft. total dynamic head
- 6. EQUIPMENT CONDITION:

The seals need normal maintenance.

7. Life expectancy remaining 3 years.

- 1. NAME: Cooling Tower No. 1
- 2. FUNCTION: To cool condenser water from common system serving Chillers.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Equipment Condition
 - b. Fan RPM
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 60 HP 1750 RPM
 - b. Design: Capacity to cool 3100 GPM of condenser water from 101.6° to 85° with 78°F wet bulb.
- 6. EQUIPMENT CONDITION:

The tower needs some minor maintenance.

7. Life expectancy remaining 1 year.

- 1. NAME: Cooling Tower No. 2
- 2. FUNCTION: To cool condenser water from common system serving Chillers.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Equipment Condition
 - b. Fan RPM
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 60 HP 1750 RPM
 - b. Design: Capacity to cool 3100 GPM of condenser water from 101.6° to 85° with 78°F wet bulb.
- 6. EQUIPMENT CONDITION:

The tower needs some minor maintenance.

7. Life expectancy remaining f years.

- 1. NAME: Cooling Tower No. 3
- 2. FUNCTION: To cool condenser water from common system serving Chillers.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Equipment Condition
 - b. Fan RPM
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: Fan Motor 60 HP 1770 RPM
 - b. Design: Capacity to cool 3100 GPM of condenser water from 101.6° to 85° with 78°F wet bulb.
- 6. EQUIPMENT CONDITION:

The tower need some minor maintenance.

7. Life expectancy remaining 6 years.

May 1970.

- 1. NAME: Compresors No. A4-1 & A4-2
- 2. FUNCTION: to maintain pressure in the domestic water tanks.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Frequency and period of running
 - b. Equipment Condition
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 7.5 HP 1740 RPM
 - b. Shop Drawings: 7.5 HP 440V 1750 RPM 29 CFM @ 175 psi
- 6. EQUIPMENT CONDITION: Both compressors appeared in good physical condition.
- 7. Life expectancy remaining 3 years.

EQUIPMENT REPORT NO. 36

- 1. NAME: Compressors No. A4-3 & A4-4
- 2. FUNCTION: Supply compressed air for various uses in building.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Frequency and period of running
 - b. Equipment Condition.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 20 HP 100 CFM 100 psi
- 6. EQUIPMENT CONDITION: Both compressors appeared in good physical condition.
- 7. Life expectancy remaining 3 years.

EQUIPMENT REPORT NO. 37

- 1. NAME: Compressors No. A4-5 & A4-6
- 2. FUNCTION: To supply compressed air for the building and equipment room automatic controls systems.
- 3. FIELD DATA TO BE ACQUIRED:
 - a. Frequency and period of running.
 - b. Equipment Condition.
- 4. FIELD DATA:

See Appendix D

- 5. DESIGN, NAMEPLATE OR SHOP DRAWING DATA:
 - a. Nameplate: 7.5 HP 29 CFM 175 psi
- 6. EQUIPMENT CONDITION: Both compressor appeared in good physical condition. Filters need replacement.
- 7. Life expectancy remaining 3 years.

SECTION 2

APPENDIX D

The following pages contain copies of the field data as taken in the field for all of the major pieces of airconditioning equipment.

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

EQUIPMENT REPORT Nº (AHU-1)

FIELD DATA

(FOR LOCATION OF READINGS SEE DRAWINGS)

STATIC PRESSURE

					•*
$\langle 1-1 \rangle$	RETURN	AIR	PLENUM	-	42 INCHES

(1-2) DOWNSTREAM OF FILTERS -1.17

(-3) DOWNSTREAM OF PREHEAT COLL -1.73

FAN DISCHARGE + 7.47 "

(-5) COLD SUPPLY DUCT + 6.60

(-) HOT SUPPLY DUCT + 6.10

TEMPERATURE

TEMPERATURES RECORDED DURING MAXIMUM OUTSIDE AIR TEMPERATURES SEE PECORDER CHART I POINTS THRU

APPENDIX D

		10 mg/30	400				l a sa sa gla		
					 			The second of	
				100		A		_	

NOI (AHU-1)

FIELD		DISYMINGSO
(FOR LOCATION OF	SEVDING 2	
(LOIS FOOTILIES	DITAT TI	BE INSERTED

AIR VELOCITIES	2	V15	

	PITO! 1000 11000.	The same of the same and the same of the s	1500-
L(1-1) 60"DIA DUCT (CO	V DY INC	HB	16.0.0
LOT 60"DIA DUE! (CC	5.0	The second secon	1600
	9.0		1650
		and the same particular and the same same same same same same same sam	1750
	20.0		1900
	25.0	The state of the s	2000
	30.0	And the second s	1020 -
I DIVIT (C	OLD)		2.150
L(1-2) 60" DIA. DUCT (C	5.0		2150
	9.0		2150
	13.5		5120
	20.0		2100
	25.0	4	2100
	30.0	AVERAGE	1980
L(1-3) 42" DIA. DUCT	(HOT) = 3.5 6.0 14.0 21.0	AVERAGE	190 00000000000000000000000000000000000

FLECTZICAL

APPENDIX D

160 - RUNNING AMPS

FAN MOTOR 440 VOLTAGE

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001590

FAN

- RPM

1160

	لې نان	; ; ;					MAXTMU COTORIZ
ORAWINGS)	- 28 INCHES	" 37	28.	+6.20 "	+ 3.60 :	: 0 N ri	S SEE PE
FIELD DATA FOR LOCATION OF READINGS SEE DRAWIN	RETURN AIR PLEKUS	DOWNSTREAM OF FILTERS	DOWNSTREAM OF PREHEAT COIL	FAN DISCHARGE	corp supply puct	HOT SUPPLY DUCT	OUTSIDE AIR TEMPERATURES SEE PECORDER
زده		(2-2)			(2-2)		で買
	STATIC PRESSURE						TEMPERATURE

APPENDIX D

	4.5
0-0T NOX (AHU-2)	
 EQUIPMENT REPORT NO# (AHU-2)	
FIELD DATA	
 FIELD DATA	

P(10) 1056 119	1700
L(2-1) 60 "DIA DUCT (COLD) 5:0	NCHES 1300
L(2-1) 60 DIA DOCT (COS) 5.0	1300
	1300
13.5	300
70,05	1300
<u> </u>	And the second s
The second secon	900
L(2.2) 60 "DIA. DUCT (COLD) 1,5	
	1150
9,0	1150
13,5	1700
20.0	12 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	A STATE OF THE STA
The state of the s	AVERAGE -> 1190
	AVELLE

L(2-3) 42 " DIA. DUCT (HOT)	1.0 INCHES 1650 1650 1700 6,02 1700
L(2-4) 42" DIA. DUCT (HOT)	9.5 14.0 21.0 21.0

94

440 Approved For Release 2001/07/12 : CIĀ-RDP78-05732A000100050001-9

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

- RPM

970

Approved For Felease 2001/0 /12 : QA-RDF 78-057 2A00 100050 01-9

EQUIPMENT REPORT Nº3 (AHU-3)

FIELD DATA
(FOR LOCATION OF READINGS SEE DRAWINGS)

STATIC PRESSURE

(3-1)	RETURN AIR PLENUM	29	
(3-2)	DOWNSTREAM OF FILTERS	60	
(3-3) 1.	DOWNSTREAM OF PREHEAT COIL	62	8
(-)	FAN DISCHARGE	+9.50	
(=5)	COLD SUPPLY DUCT	+ 5.70	
(.4)	HOT SUPPLY DUCT	+ 6.00	

TEMPERATURE

TEMPERATURES RECORDED DURING MAXIMUM
OUTSIDE AIR TEMPERATURES SEE RECORDER
CHART IT POINTS I THRU &

APPENDIX L

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

EQUIPMENT REPORT NO4 (AHU-3)

FIELD DATA

(FOR LOCATION OF READINGS SEE DRAWINGS) PITOT TUBE INSERTED

NID	VEL	OCIT	1ES

P11	01 1000 111	.,	300
The DIVITION	1.5 INC		550
(3-1) 60"DIA DUCT (COLD)	3.0	A CONTRACTOR OF THE PARTY OF TH	550
	7.0	and the same of th	600
	73.5		1650
	20.0	AND THE RESERVE AND ADDRESS OF THE PARTY OF	1500
		Company of the Compan	
-(-0.0)	1,5		12.50
L(3-2) 60" DIA. DUCT (COLD)	5,0		1300
	9,0	The second secon	1200
	13,5	The same of the sa	1200
	20,0		1500
· · · · · · · · · · · · · · · · · · ·	30.0		
	" and the second		

	AVERS 2 III / I I I
L 3-3 42 " DIA. DUCT (HOT)	
L(3-4) 42" DIA. DUCT (HOT)	9.5 14.0 21.0
(3-4) 42" DIA, BUZI (1131)	3,5 6,0 9,5 9,5 900 14,0 21,0
	2//0

7 10100

ELECTRICAL

PAGEGOF Z

- RUNNING AMPS 120

440 VOLTAGE Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-8

- RPM FAN

1140

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

.

TEMPERATURE

	EQUIPMENT REPORT Nº4 (AHU-4)	
	FIELD DATA (FOR LOCATION OF READINGS SEE		
STATIC PRESSURE	RETURN AIR PLENUM	- 32 INCHES	
	DOWNSTREAM OF FILTERS	8z "	
	DOWNSTREAM OF PREHEAT COIL	35 "	
	FAN DISCHARGE	10 "	
	COLD SUPPLY DUCT	+ 5.20 "	
	HOT SUPPLY DUCT	+610 "	

TEMPERATURES RECORDED DURING MAXIMU

OUTSIDE AIR TEMPERATURES SEE RECORDER CHART 7/ POINTS / THRU 6

Approved For Repase 2 01/07/ 2 : CIA/RDP79 05732 4000100050001-9

EQUIPMENT REPORT NO4 (AHU-4)

(FOR LOCATION OF READINGS SEE DRAWINGS)

SIA

VELOCITIES	PIT	OT TUBE INSERTED	VELOCITY - FPM
	L(4-1) 60"DIA DUCT (COLD)	1.5 MCHES	1600
		5,0	2100
		9,0	2050
		13.5	20.00
		20,0	0281
		30,0	1800
		E	
	(4.2) 60 "DIA. DUCT (COLD)	1,5	2000
		570	2100
		9.0	2050
	en e	13,5	1900
	ommente de la constitución de la c Constitución de la constitución de	20.0	1700.
•		30,0	1850
		ا المعاد العبيدة المعاد الموسوع العداليون المواد المدار المدار المعاد العبد العبد العبد المدارد المدارد المدار المدارد المعاد المعاد المعاد المدارك المعاد المدارد المدارد المدارد المعاد المدارد المعاد المعاد المعاد المدار	and the second of the second o
			VERAGE 1920

	AVEL = (300
(4-3) 42 " DIA. DUCT (HOT)	1.0 NCHES 1300
	3.5 (600 6.0 (650 9.5 (700 740 (700 210 (700
(4.4) 42" DIA, DUCT (HOT)	7.0 3.5 6.0 9.5 14.0 17.00 17.50
	WEDACE-1570

FLECTRICAL

FAN MOTOR - RUNNING AMPS 147

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

PAGE 8 OF APPENDIX Approved For Release 2001/07/12 -- CIA-RDP78-05732A000100050001-9

FOUIPMENT REPORT Nº 5 (AHU-5)

FOR LOCATION OF READINGS SEE DRAWINGS)

STATIC PRESSURE

\bigcirc	RETURN AIR PLENUM	- 42	INCHES
\overline{a}	DOWNSTREAM OF FILTERS	-1.17	##
$\overline{\bigcirc}$	DOWNSTREAM OF PREHEAT COIL	-1.73	
$\overline{\bigcirc}$		+7.47	
$\overline{\bigcirc}$	CO2- 041, 2,	+ 6.60	
$\overline{\bigcirc}$	HOT SUPPLY DUCT	+ 6.10	**

TEMPERATURE

TEMPERATURES RECORDED DURING MAXIMUM OUTSIDE AIR TEMPERATURES SEE RECORDER CHART IV POINTS I THRU 6

Approved for Release 20/1/07/12 : CIA-RDP78-05732A000100050001-9

EQUIPMENT REPORT NO (AHU-5)

FIELD DATA

(FOR LOCATION OF READINGS SEE DRAWINGS)

AIR	NE)	LOC	IT	ΙE	5
-----	-----	-----	----	----	---

	PITOT TUBE INSERT	ED VELOCITY - FPIN
L(5-1) 60 "DIA DUCT (COLI	D) IS INCH	12350
2011 60 212 2001 (6002)	5.0	2600
-	9,0	25.50
	13.5	2550
	20.0	2400
	30.0	26,50
	-1.5	2700
L(5-2) 60 "DIA. DUCT (COLI	5.0	2250
(1) 00 1	9.0	2750
	13.5	2650
	20.0	2850
	30,0	2650 H
	and an expectation of the control of	the second of th

	AVERAGE -> 2600
(5-3) 30 DIA. DUCT (HOT)	1.0 INCHES 1500 2.5 2000 4.5 2200
L(5-4) 30 DIA DUCT (HOT)	7,0 10,0 15,0 23,00 1,0 2,5 23,00 2,5 24,00 7,0 10,0 15,0 2,500 2,
	AVERAGE 2/80

electrical

FAN MOTOR - RUNNING AMPS 162

VOLTAGE 440

Approved Fer Release 2001/07/12: CIA-RDP78-05732A000100050001-9

DAMENDY D

EQUIPMENT REPORT Nº 6 (FAN #13) FIELD DATA FPM (FOR LOCATION OF READINGS SEE DRAWINGS) VELOCITY AIR VELOCITIES TUBE INSERTED 44" DIA DUCT (RETURN) 1.5 1800 1950 4.0 1700 1950 7.0 1700 10.0 1800 14.5 1800 1550 1000 22,0 : 400 1700 2000 30.0 2000 34.0 IERAGE 1700 71825 ELECTRICAL FAN MOTOR RUNNING AMPS 32 440 VOLTAGE 1180 RPM RPM 775 FAN JULY STATIC PRESSURE INCHES

APPENDIX D

EQUIPMENT REPORT Nº 7 (FAN#14) FIELD ATAG READINGS SEE DRAWINGS) AIR VELOCITIES 1.5 INCHES 1900 4.0 2000 1400 10.0 1600 14.5 1400 1000

ELECTRICAL

1600

1600

2000

36 RUNNING AMPS 440 1180 FAN

PRESSURE

22.0

30.0

EQUIPMENT REPORT Nº8 (FAN #15)

(FOR LOCATION OF READINGS SEE DRAWINGS)

FPM VELOCITY- FI

AIR VELOCITIES

8-1) 44" DIA DUCT (RETURN) 1.5 INCHES
4.0
7.0
10.0
14.5
22.0
30.0

1100 1750 1100 1900 1300 1950 1100 1950 800 1800 1200 1600 1250 1900

AVGANERAGE -> 1880

ELECTRICAL

FAN MOTOR - RUNNING AMPS 35

VOLTAGE 440

RPM 1180

FAN - RPM 775

JOLY SEPT

34.0

STATIC PRESSURE

3-1) FAN INLET - 5.2 -4.80 INCHES

(8-2) FAN OUTLET - .2 + .39 INCHES

PAGE 13 OF

EQUIPMENT REPORT Nº 9 (FAN # 16)

(FOR LOCATION OF READINGS SEE DRAWINGS)

FPM VEWCITY-FP

500

1650

AIR VELOCITIES

44" DIA DUCT (RETURN) 1.5

1.5 INCHES
4.0
7.0

10.0

14.5

22.0 30.0 800 1700 400 1000 2500 1550

> AMERICAGE => 1590

800

750

1000

850

64.0

/300 1850

ELECTRICAL

-AN MOTOR - RUNNING AMPS 32

VOLTAGE

440

- RPM

1180

FAN

RPM

770

STATIC PRESSURE



FAN INLET

-5,2 -4.60

INCHES



FAN OUTLET +, 06 + .44

INCHES

EQUIPMENT REPORT Nº 10 (FAN #17) DATA FPM FIELD READINGS SEE DRAWINGS) (FOR LOCATION OF AIR VELOCITIES TUBE INSERTED 44" DIA DUCT (RETURN) 1100 4.0 1500 1950 7.0 2000 1600 2000 10.0 1600 1800 14.5 1700 22.0 1600 NV5 113.50 1400 2000 30.0 1550 2000 AUG-DAVERAGE -> 1880 1480 38 440 1175 RPM 780 RPM FAN

INCHES

PAGE 15 OF 2

STATIC PRESSURE

EQUIPMENT REPORT Nº LI (FAN #19)

FIELD DATA

(FOR LOCATION OF READINGS SEE DRAWINGS)

FPM VELOCITY-FPA

1650

1800

2000

900

1000

1400

1900

AIR VELOCITIES

11-1) 44" DIA DUCT (RETURN) 1.5 INCHES
4.0
7.0
10.0
14.5
22.0
30.0

AUG ANERRAGE > 1700

4:0

200

100

100

500

1100

1400

ELECTRICAL

FAN MOTOR - RUNNING AMPS 37

- VOLTAGE 440

RPM 1180

FAN - RPM

775

34.0

STATIC PRESSURE

I-I) FAN INLET

JULY SEPT -5.2 -4.80

INCHES

(11-

FAN OUTLET - OS + OZ TOCHES

APPENDIX L

EQUIPMENT REPORT Nº12 (FAN#19) FPM DATA FIELD (FOR LOCATION OF READINGS SEE DRAWINGS) VELOCITY - FP AIR VELOCITIES TUBE INSERTED 44" DIA DUCT (RETURN) 1.5 4.0 1450 2000 7.0 1500 10.0 2000 14.5 17 50 1100 22.0 2000 30.0 34,0 AVG AVERAGE 1880 ECTRICAL 32 - RUNNING AMPS 440 1130 - RPM RPM 775 INCHES STATIC PRESSURE

EQUIPMENT REPORT Nº13 (FAN #20) ATAD READINGS SEE DRAWINGS) (FOR LOCATION OF AIR VELOCITIES TUBE INSERTED 1.5 400 4.0 1200 7.0 300 1300 1550 10.0 400 800 14.5 300 300 22.0 300 300 400 30.0 1100 34.0 960 AV GAVERAGE 340 .29 RUNNING AMPS 440 1180 RPM 730 RPM FAN INCHES

INCHES

STATIC PRESSURE

EQUIPMENT REPORTS 14 THRU 22 FIELD DATA

REPORTUNO	· FAN Nº	DISCHARGE VELOCITY	DISCHARGE SIZE
14	6	1700 FPM	35"×26"
15	7	* 2800	21" × 29"
16	8	3000	19,5" × 26"
17	9	1900	19.5" × 26"
18	16	3200	19,5" × 26"
19	IA	3500	26" × 20"
20	21	1650	65"DIA.
21	22	1900	29"×21"
22	23	3800	24"×18"

Nº 23/24 & 25

		· · · · · · · · · · · · · · · · · · ·		FIECD DA	e- (Fall) his		The second second second second second
EQUIPMENT	CHILLER	CHILLE	OWATER		1 CON	derese a	JATEVZ
esport -No	No.	FLOW (GPM)	TEMPERA	TURES (°F)	(GPM)	IN of	FOUT
23		1660	48	42	2700	62.	92
2 4	. 2	1600	4 9	42	3000	82	92
Z Z Z	3	1180	49	42	1760	And the second s	02
APPENDIX D	Approved F	or Release 2001/0	7/12 : CIA-RDP78-0	5732A000100050001	Posses de deligram de presidente des autoritàres des constantes de la constante de la constant	Paddinished. ***THE COLUMN TO THE COLUMN TO	

EQUIPMENT REPORT Nº 26 THEU Nº 31 (PUMPS)

EQUIP: DEFORT NO.	DUMP SERVICE AND NO.	FLOW (GPM)	HEAD PRESS	LEAVING	EPM
26	CHILLED WATER	1670	28,0	62.0	1790
27	CONDENSER WATER P-1	2700	8.5	52.5	1705
7.S	CHILLED WATER	1600	27.5	. 6 4,5	1785
29	CONDENSER	3010	7.0	53,0	1790
30	CHILLED WATER	1200	29.0	58.0	1785
31	CONDENSER WATER P-3	1760	*	510	1805
7 7					Paragraphic designation of the Control of the Contr
PA	')	

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

* GAGE NOT OPERATING

EQUIPMENT REPORT Nº 32, 33 & 34 (COOLING TOWERS NO.: 2,3)

EQUIPMENT REPORT NO.	COOLING TOWER	FAN MOTOR RPM
32		1780
33	2	1775
34	3	1780

PAGEROLIS

EQUIPMENT REPORTS NO 35, 37, &37 (COMPRESS)

EQUIPMENT REPORT Nº	COMPRESSOR	FIREQUENCY *	TIME
35 35	A 4-1 A 4-2	6 minutes	15 seconds 3 secords
36 36	A 4-3 A 4-4	14 minutes	3.5 minutes 3 minutes
	A4-5	6 minutes	1 minutes 45 seconds 2 minutes 15 seconds
A PRONDIX	A 4-6	6 minutes	
MDIX			


Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9


Compressors Alternate - time indicated is for the same compress)


SECTION 2


APPENDIX E


The following charts are for the temperatures and flow rates of the process water system.

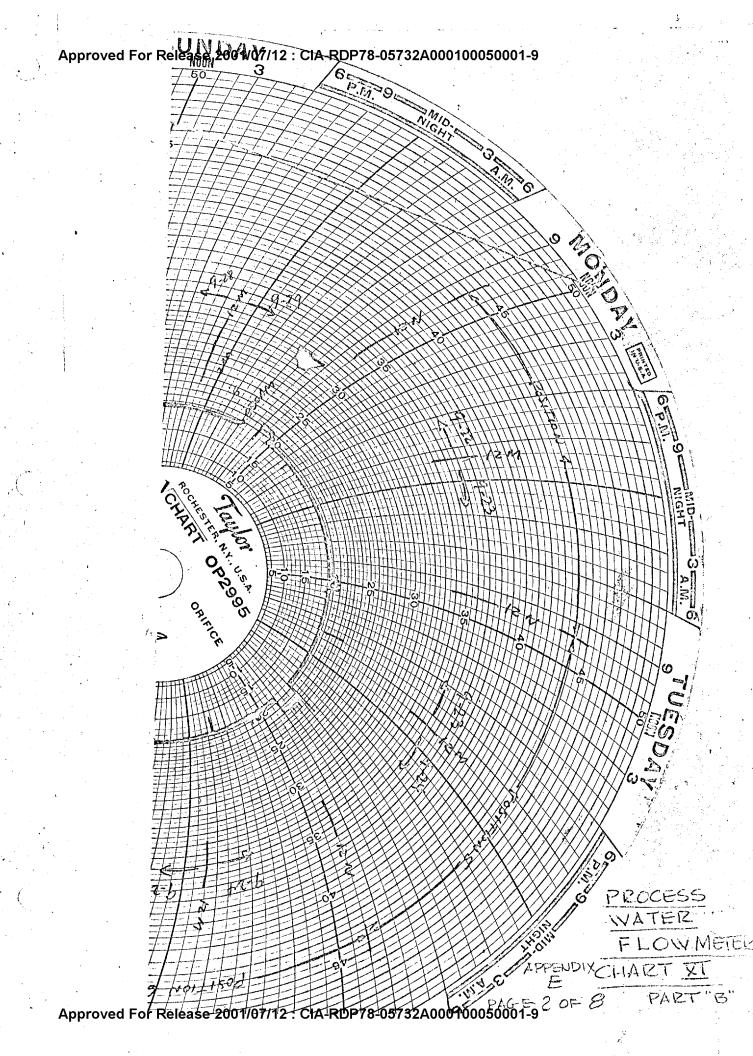

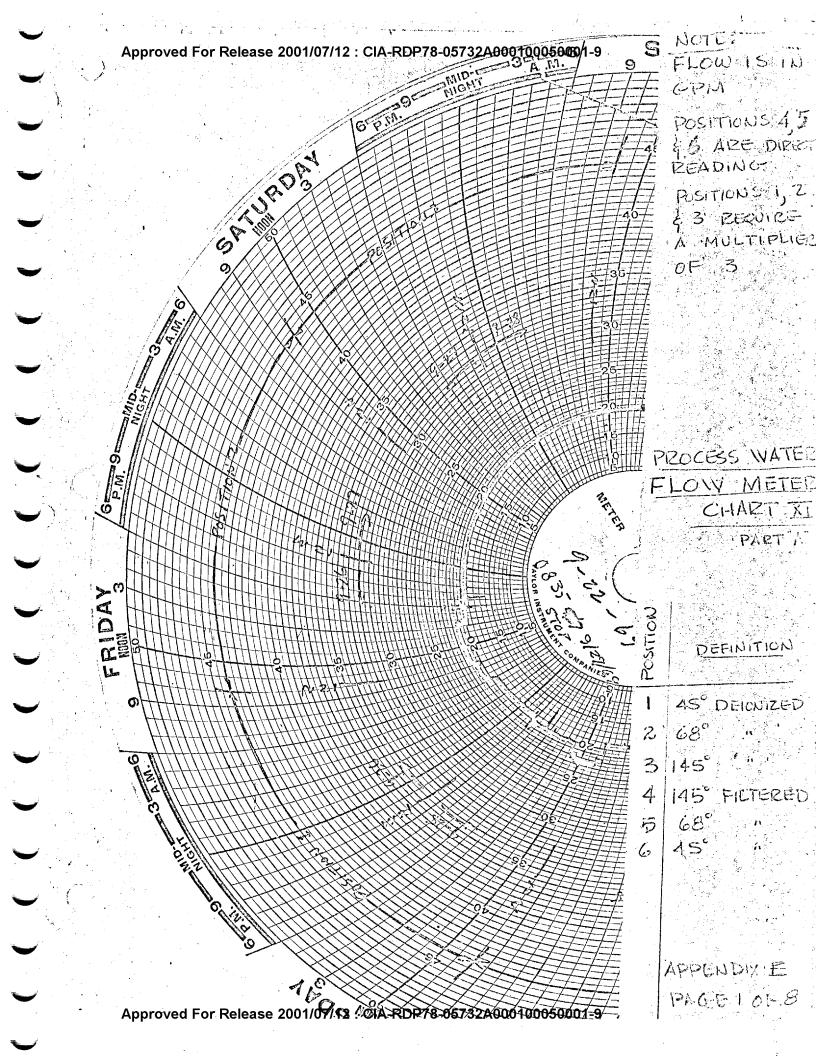


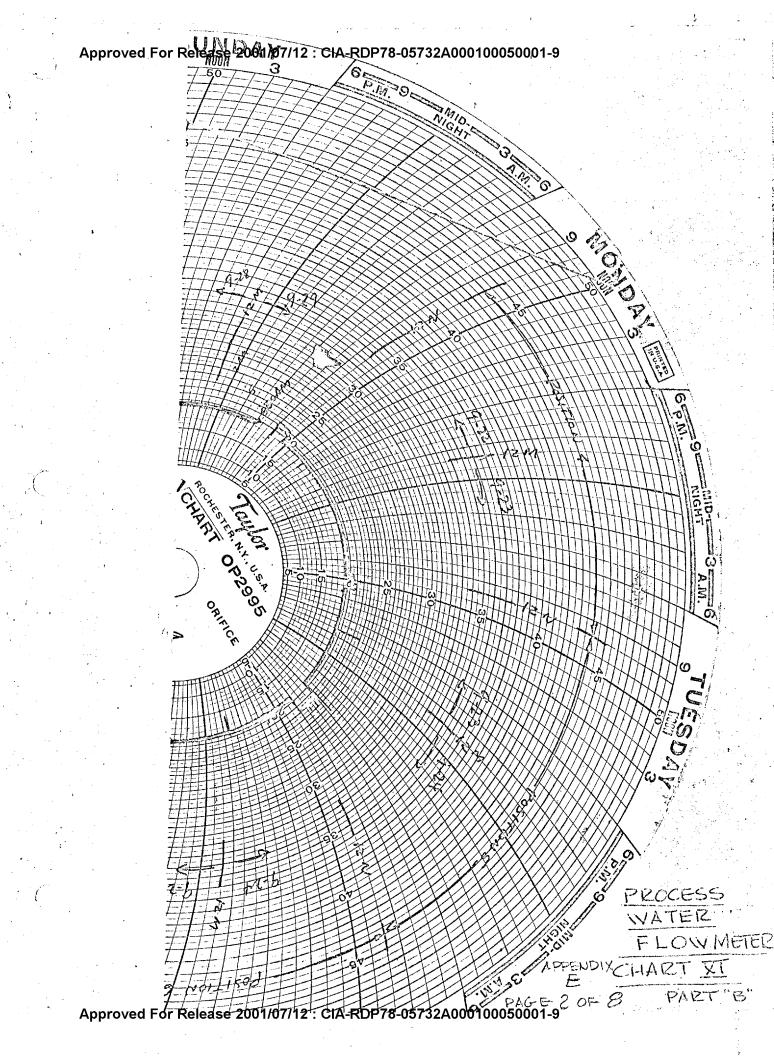


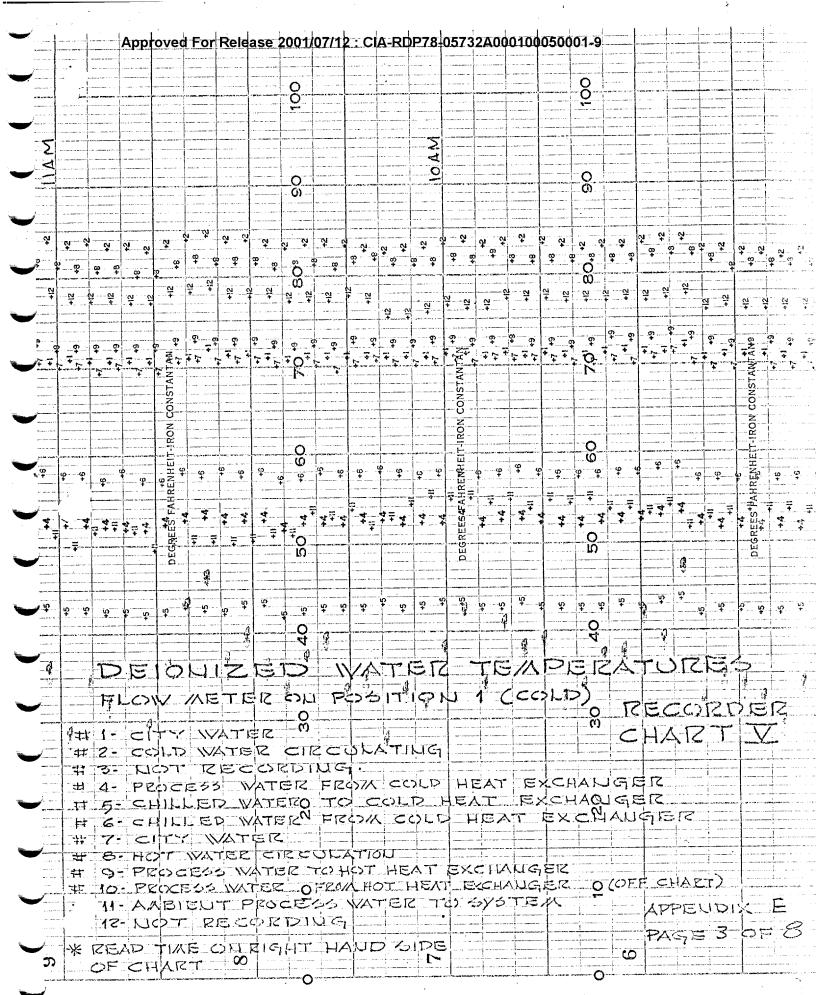


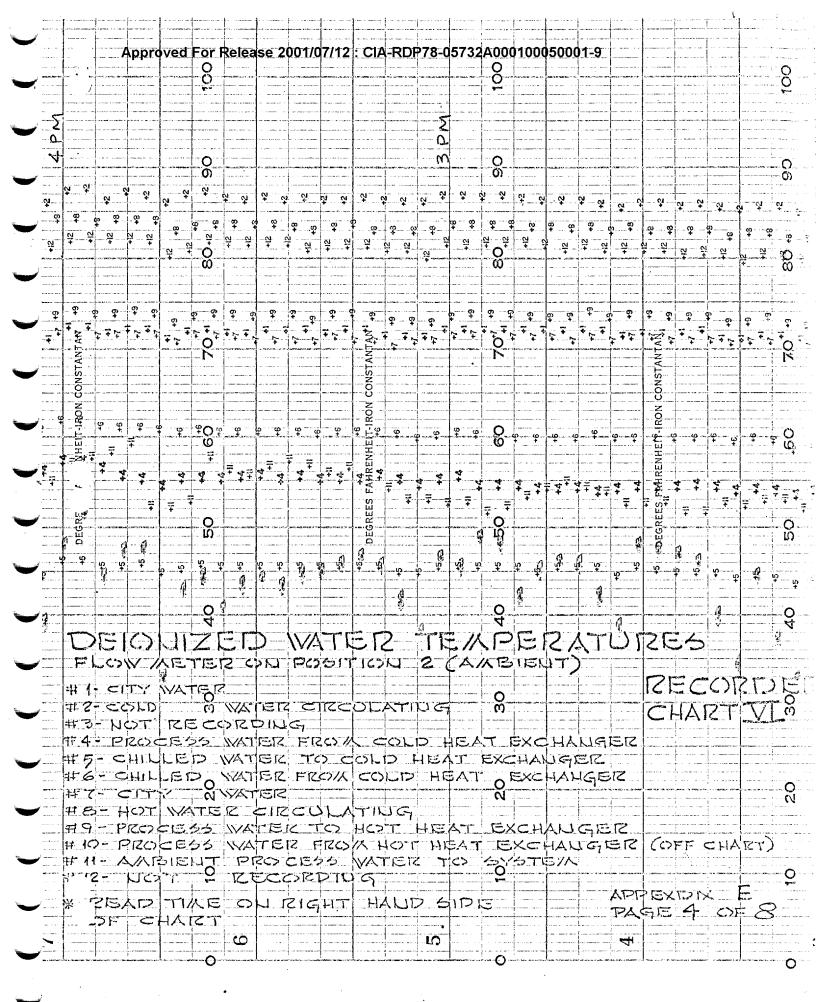

			Appr	oved	For	Rele	ase 2	001/	07/12	: Cl	A-RD	P78-0	5732	2A00	0100	0500	01-9	1						
M						ļ						مَّ												
10	Ţ. Ţ							8				4					8	1_						
								5				ļ					- 	-	_					L
								I										-						
		and the later later 1							<u> </u>		ļ					1	 							L
																		-						
		*******				-		0					~ p .manda.sp a./w				ု ဝွ				A-0.4-100			
								0	1		1					L	O1		N	_ ¥	ÇI 0	Q!	₩ ₩	
2	ф .	Q	한 한	2	å å	ÇĮ S	i çi	φ. φ	φ	À 4	5 B 5	Ç (2 2	\$ ~ ¥	Å	φ ÷		φ.	φ.	60 to		8 8		8
	3 4	-œ	φ	ထု တု	₽	φ φ	\$ \$. _ -	*	P 9	f	Ť ę	rp 4		+ 9		+ q	- [21 2		+			L
2	~	는 <u>약</u>	22 .	2	일 ,	.	1	122	4 - 4	ļ	<u>u</u> (기 + 신	· - 약	4	- 4	각	걸	- Ç	1	2	+	7 7	+ 0	¥
[+	+ :	Ì	7 7	! 악	구 구	$\mathcal{L}_{\mathbf{Q}}$	ei ei	각 각		+	T		N STOCK SACROST TAX		မ္မ					ya rokyakan razinkira s		
						ļ		- ω							-	T								+
				·				<u> </u>																-
						-	1							Ī				_						1,
			77		Ŧ F		J -	F 70	+ 4 7	- t- =		· · · · ·	4 ×4	77	7 7	++	· · o	Ŧ.,	24	7.7	F 7 7	7 7 7	AN	₹
7 +	++-		* + 1	T A	*	77	4 4 5	6				+ +	Z Z		1	1				g		- σ	\$	- 0
2 - 9	. .	6	} _ş_	NSTAN	\$	5. S	g g	, i = \$	6 4 4 1	Ç	T 20	64)+	CONSTANT	gg	5 +	} '	1.69 + 1.69 + 1.69		7	e +	± 5	φ φ ∓ ∓	ONSTAC	7
.	¥	¥		N S	₹	7 7	ŦŦ	+	++	+ +		7	+ N	+-	<u> </u>			_ •					- 8-	i.
			-	ď	-							1	N N			1							NO.	-
				EIT-IRON									-IRON	ļ			- c	,					L.E.	
emirate Y	Name and Property		NAMES OF PERSONS AND DESCRIPTIONS	1-1	-			္ထ					<u> </u>				ŭ)					핃	
				+6 FAHRENHE					_		_		FAMRENH								φ φ		FAHEENHE	!
φ.	į,			- CK	φ φ			တ္ တ္	- ¢ -4	9	တူ ထု	φ	A H	9+	φ	9 9	-	9 4	٩	φ 	Ŧ_Ŧ	<u> </u>	FAH	-
	1	φ		FA	-	2	φ	+		- ¥			v											ا ند
				EES									ᇤ			_)				***	DEGREE	
B.100.00			6-mary	* DEGREES F	-			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		-			+ DEG		4	4 -	1 1 1 L)	9			e + +	A B	*
7	4 3	4	4 4	*	4 +	*	4 4	7 7	7	* *		4	7 7	*	*			7				1		
		-															_ _	_ _			LOT .	, , , , , , , , , , , , , , , , , , ,	t t	
/ s	U	,		-	- LO LO		10		10	ئر ا	, y	5 A	5 5	ις. ·	ပံ က်	· · ·	ិ ប្		P T	<u>}¥</u>	1	f v	-	 .
	*' 1	t t	_ []	* *			¥ ¥		*			awan i meneg sere						<u> </u>]	1	_		
		1						্ৰ						1-	4	1-	_	₫ 🖟					-	
<i>j</i>		(F		113-				\	WA		=12	,	71=	\ \	P	F.	SV		-)[ZE	-/-	>	I_{i}	-
		71		115	مالا	こだ	ه ا م												- 1				1:	*
- 1	1.	1	> /\		5 ,711	216	ري	N	. رے سرا 	- 6	1 10	للإ	1			1-				<u> </u>	75	121) [-	eszi Kárt
3	1.	Ŷ.			1	1	-	. \$ C		1.		*	- 1 1		*))						<u> </u>
	71	-		TY.	WA.	TER.		מ לו	- -اب	4	" 1	~ f								JH	Al	21	-	V
 بــ الد			~64.23		77	٠ سر بيسسر	マロンギ	211	("	101	1	<u>i</u>					!_							
	. 1	. 1			ر ۱۰۰۰ جيشون ۾	- · · · · · · · · · · · ·	· · · / / · · ·	ما سندامه	フービリ	zcz	W C	حاج:	1>-1	HEA	172	Ξ×c	:HX	11	GE	JZ.				
	++	٧- -	را سر 11 سر			5 W	A+E	16	T()	راح		> \ <u>H</u>	EA.	r	X	1/1	167	ET	2					
/	- 44	/				ファー	7A T	3150		25//	$C \subset C$	> H	> TF	1EZ	\r\ -	EX	CH	A	JU	FE	12.			
	41:	7 -	٠,١	7		7.1.E	srz.					1:						<u> </u> -			1			
	11 (0.250)	— ِ— `ص		طهيد	CCZA		7 6	= 112	ع کے ر	۸ ار	رات ا	19												
/	1	'		_							11/		1 1 1000	AT.	EX	- H 2	くしく	57 E	:12	, /,	اسط 	سال ۱۲۸ مم	-	, ~,
					· \ · /	- A	1 / A ~	~ r= 1	7	51700	// M	1 (.)1	1	: 4\ .1			T-1/11	95	اتا	4 (4	ستانده این ۱۳۳۱ ما ۱	- tt/:	116.1.	
 لو	T.	1	_A\/\	राउग	EU.	î T	7120			> //	WIE	512	776	> 2	V. 7.3	16						EUI		
	7.	1	L)C	>1	IZE	CC	141-	214	G7								!_			1			1	
	برج	- D	三人厂) rr	7人 1	= 0	, L	टोटा	- FIT	- 11	AU			E						PA	SE	: 5		>
3	- N	استعل	FC				. 7												9	1		1	1	

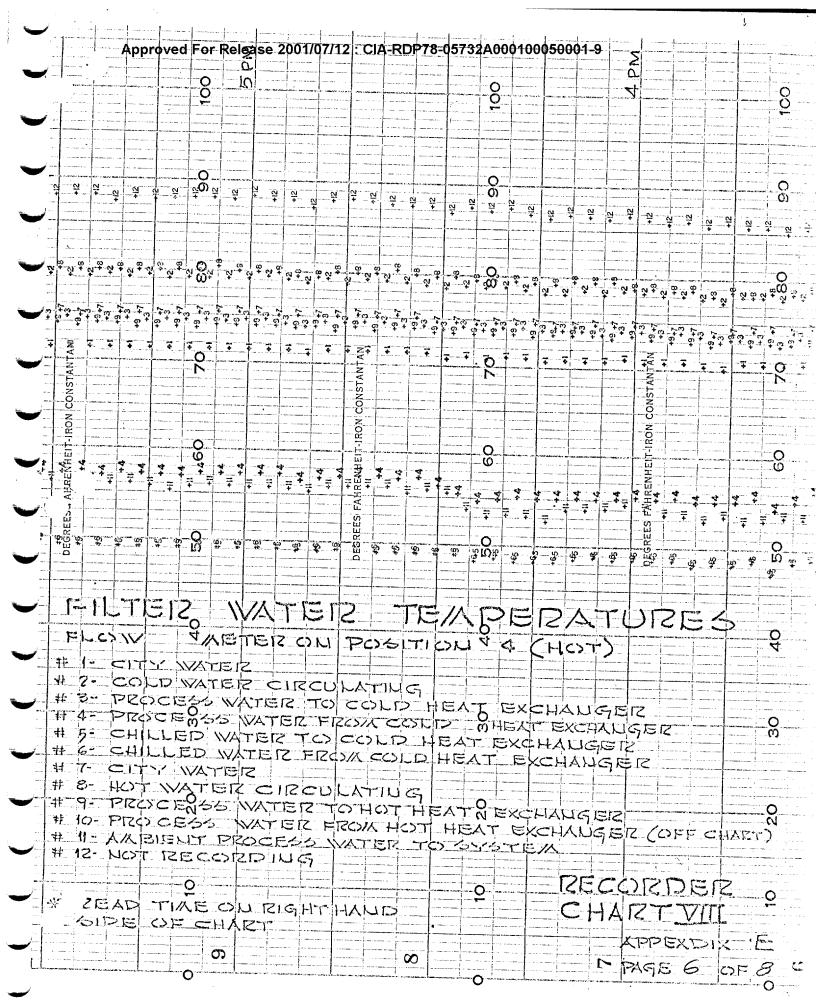

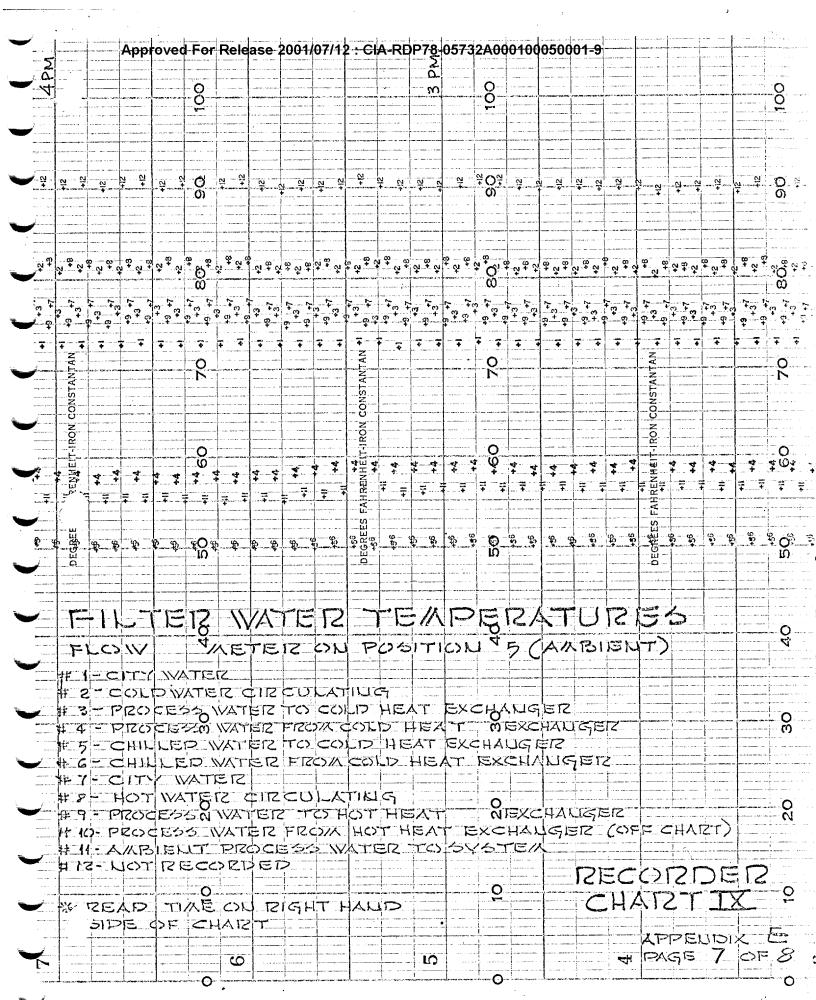

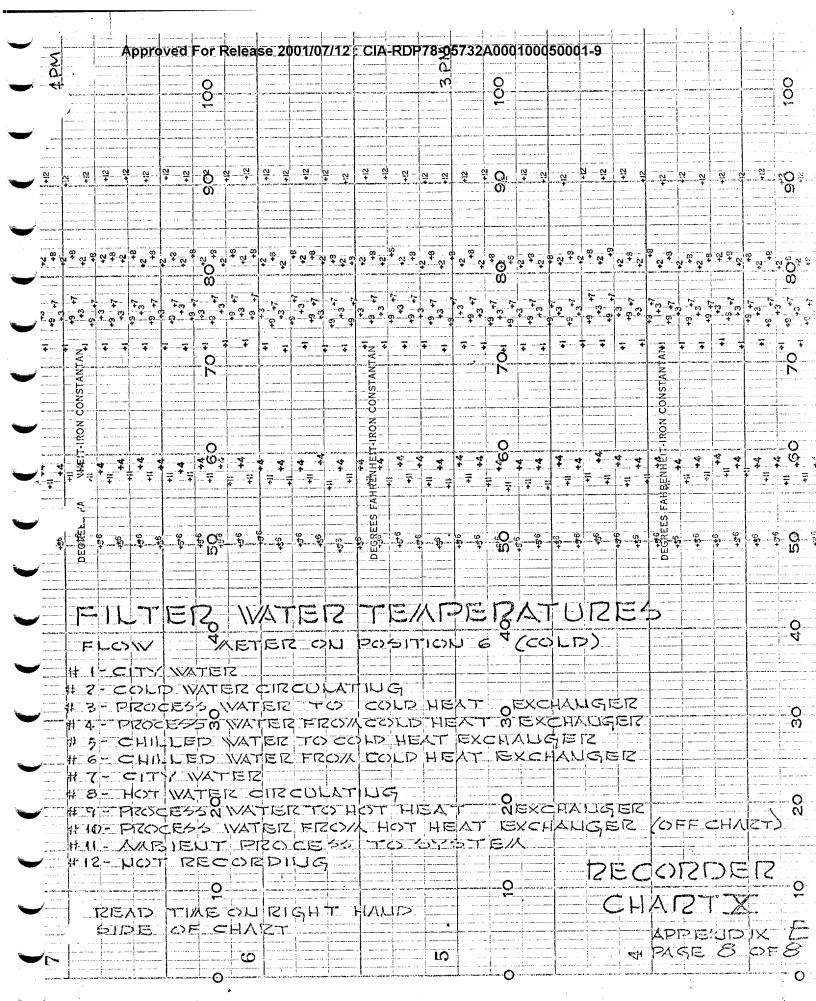

SECTION 2

APPENDIX F

by the STATINTL subcontracted the labor and instrumentation for the electrical portion of this report.

RISER #1 CENTER SHAD	FT	START STOP		10/14/68 10/17/68
Maximum Amperes Minimum Amperes		 2:55 P.M. 1:00 A.M.		•
Maximum Amperes Minimum Amperes		2:55 P.M. 1:00 A.M.		
Maximum Watts: Minimum Watts:	801 241	 2:55 P.M. 1:00 A.M.	PF: PF:	.91 .76

CHARACTERISTICS:

POWER

Load picks up at 8:00 A.M., drops off at 4:30 P.M., characterized by heavy motor starting inrush.

e...;

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9 D 120A COA AMPS D 1009 DE nors 80 KW

POWER RISER #1

CENTER SHAFT

ØA, ØC AMP RECORDING

3Ø WATT RECORDINGS

POWER RISER #2 CENTER SHAFT


START 3:30 AM 10/9/68 STOP 10:00 AM 10/14/68

Maximum Amperes ØA: 1.10A Time: 3:50 P.M. Minimum Amperes ØA: 40A Time: 12:00 Midnight Maximum Amperes ØC: 110A Time: 3:50 P.M. Minimum Amperes ØC: 1+0A Time: 12:00 Midnight

Maximum Watts: 80KW Time: 3:50 P.M. PF: .91 Minimum Watts: 24KW Time: 12:00 Midnight PF: .76

CHARACTERISTICS:

Load is building service. Picks up at 8:00 A.M., drops off at 4:30 P.M. each work day.

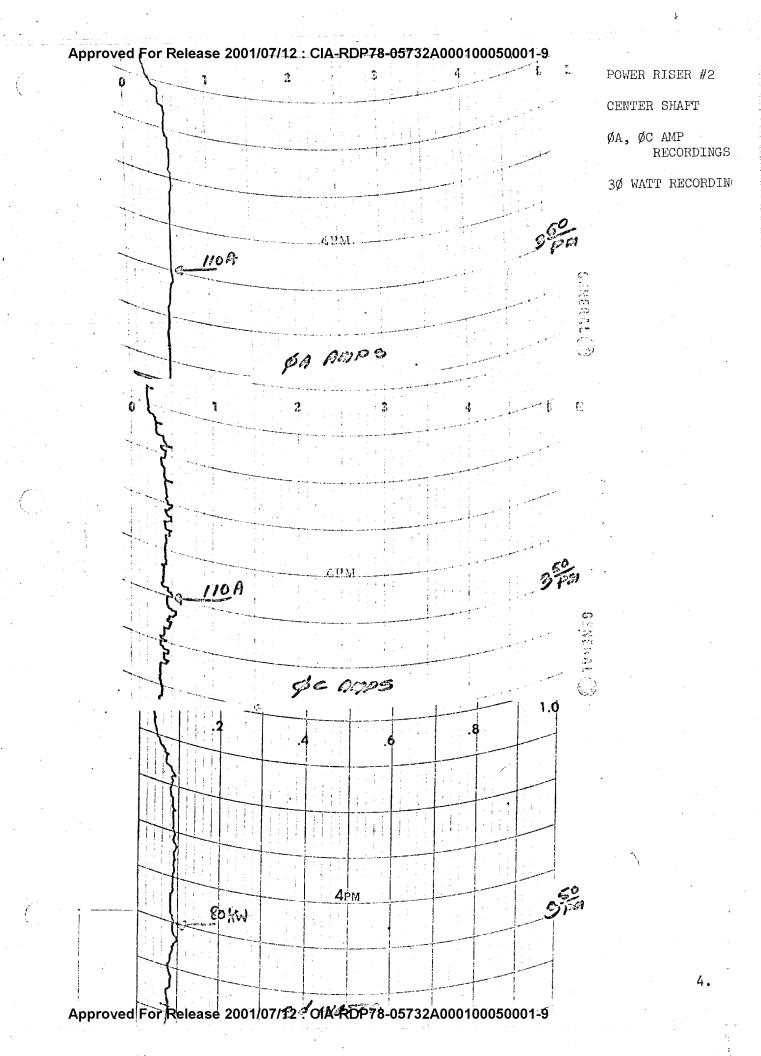


MOTOR CONTROL CENTER #2 EQUIPMENT AREA NORTH END

START 12:00 NOON 10/17/68 STOP 8:00 A.M. 10/20/68

2:40 A.M. 10/18/68 Maximum Amperes ØA: 700A Time: Minimum Amperes ØA: 520A Time: 7:30 A.M. 10/18/68 680A 2:40 A.M. 10/18/68 Maximum Amperes ØC: Time: 7:30 A.M. 10/18/68 Minimum Amperes ØC: 500A Time: PF: .88 Maximum Watts: 484KW Time: 2:40 A.M. 10/18/68 PF: .89 Minimum Watts: 360KW Time: 7:30 A.M. 10/18/68

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9 MOTOR CONTROL CENTER 3A.M #2 EQUIPMENT AREA NORTH END Ø - NEUTRAL VOLTAGE RECORDINGS Made in U.S.A. NBE 2AM12.5 ЗЛМ

Approved For Release 2001/07/12 : CIA-RDP78-057324000400050001-60-7-3

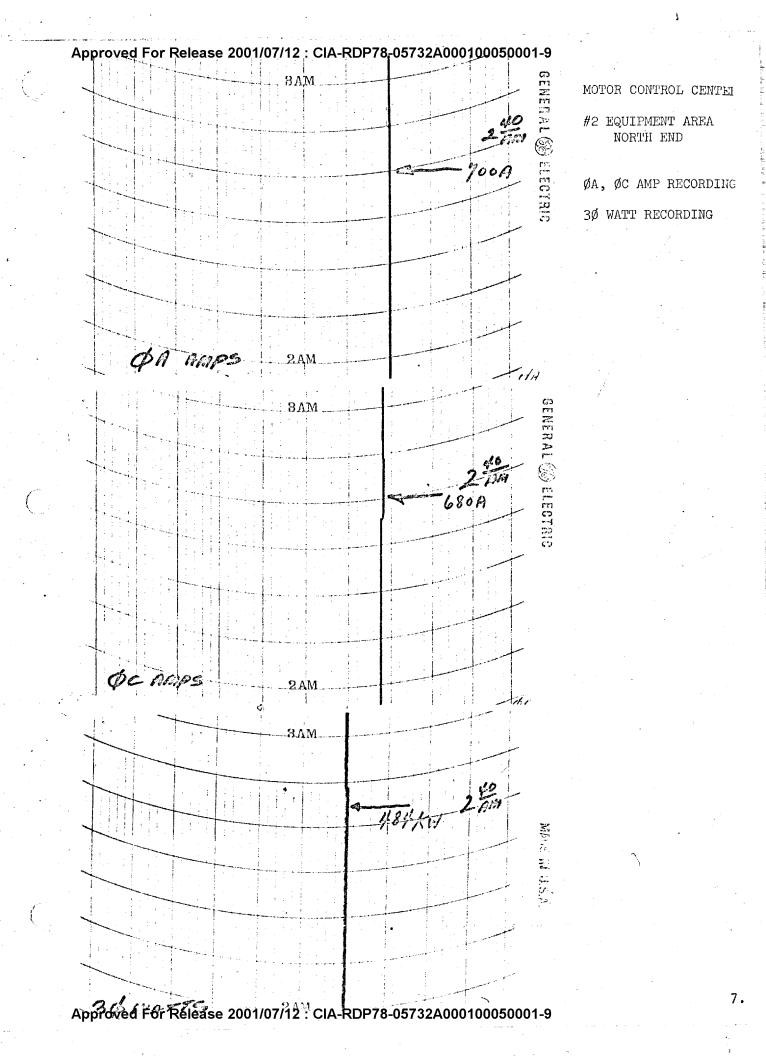

POWER RISER #2 CENTER SHAFT


START 3:30 A.M. 10/9/68 STOP 10:00 A.M. 10/14/68

Maximum Amperes	ØA: 110A	Time:	3:50 P.M.
Minimum Amperes	ga: hoa	Time:	12:00 Midnight
Maximum Amperes	ØC: 110A	Time:	3:50 P.M.
Minimum Ampores	ØC: 40A	Time:	12:00 Midnight
Maximum Watts:	80KW	; Time:	3:50 P.M.
Minimum Watts	24KM	Time:	12:00 Midnight
P.F. at Maximum	Watts:	.91	
P.F. at Minimum		.72	

CHARACTERISTICS:

Load is building service. Picks up at 8:00 A.M., drops off at 4:30 P.M. each work day.

Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

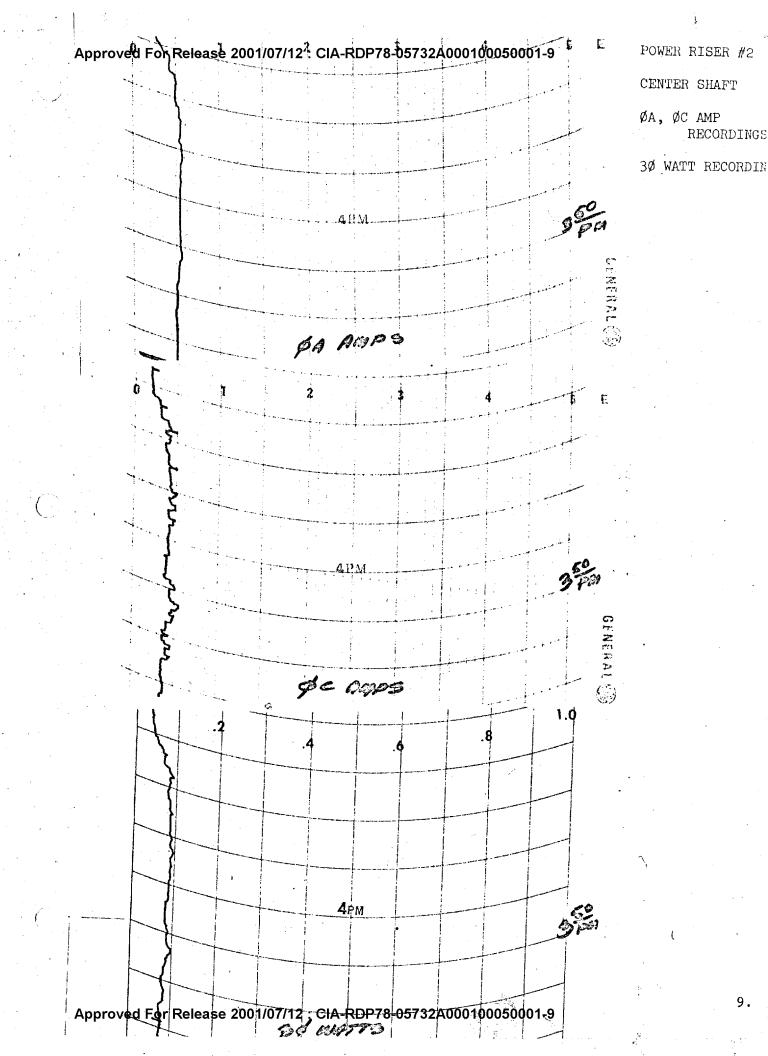

9.

POWER RISER #1 CENTER SHAFT


START 10/14/68 11:00 A.M. STOP 10/17/68 10:20 P.M.

Maximum Amperes Minimum Amperes		120A 20A	Time: Time:	2:55 P.M. 1:00 A.M.
MINIMA MADERE	y pa:	ZUA	ııme:	I.OO A.M.
Maximum Amperes		100A	Time:	2:55 P.M.
Minimum Amperes	g ØC:	10A	Time:	1:00 A.M.
Maximum Watts:		80KW	Time:	2:55 P.M.
Minimum Watts:		16KM	Time:	1:00 A.M.
P.F. at Maximum	n Watt	s:	.91	٠.
P.F. at Minimus			.78	*

CHARACTERISTICS:

Load picks up at 8:00 A.M., drops off at 4:30 P.M., characterized by heavy motor starting inrush.

Line voltage spread is from approximately \$160 volt minimum to \$175 volt maximum. Voltage drop is normally experienced on or about \$8:00 A.M. to \$8:30 A.M. Subsequently, voltage rise is normally experienced on or about \$4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

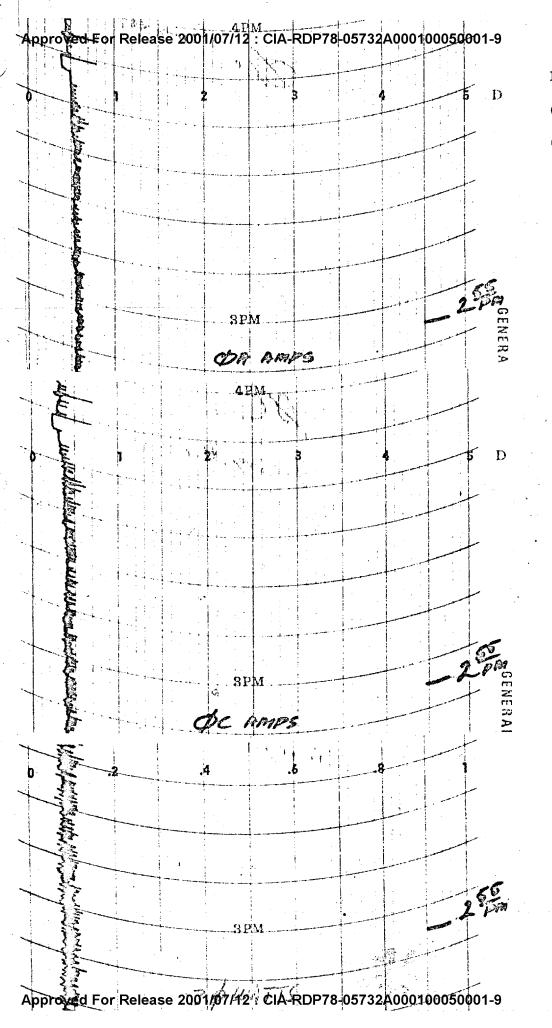

POWER RISER #1

CENTER SHAFT

ØA, ØC AMP RECORDINGS

3Ø WATT RECORDINGS


MOTOR CONTROL CENTER #2 EQUIPMENT AREA NORTH END

START: STOP:		10/17/68 10/20/68

	Amperes Amperes	700A 520A	Time: Time:		10/18/68 10/18/68
	Amperes Amperes	680A 500A	Time:		10/18/68 10/18/68
Maximum Minimum		1484KW 360KW	Time: Time:		10/18/68 10/18/68
P.F. at P.F. at			.86 .85		

CHARACTERISTICS:

Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

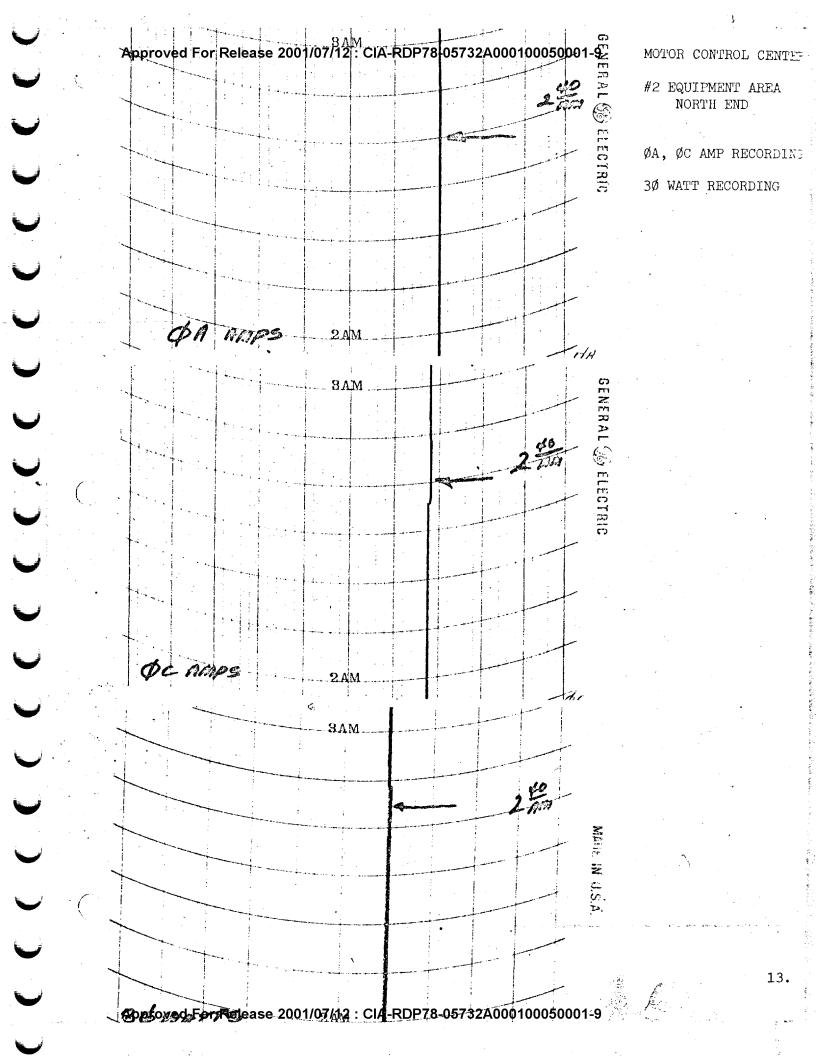


	SUBSTATION	//1	POWER	RISER.	NORTH	SHAFT	
--	------------	-----	-------	--------	-------	-------	--

START: STOP: 8:00 P.M. 10/20/68 6:00 P.M. 10/23/68

Maximum A	mperes	ØA :	1.60A		Time:	1:20	P.M.
Minimum A	mperes	ØA	50A		Time:		A.M.
Maximum A	mperes	øc :	155A		Time:	1:20	P.M.
Minimum A	mperes	&C	35A		Time:	1:00	· · · · · · ·
Maximum W	atts:	9	96kw	V	Time:	1:20	P.M.
Minimum W	atts:	á	24KW		Time:	1:00	A.M.
P.F. at M	aximua	Watts:	;		.76		
P.F. at M	dand marrie	Watta	,		60		

CHARACTERISTICS:

Load picks up at 7:30 A.M., continues until approximately 4:30 P.M. Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

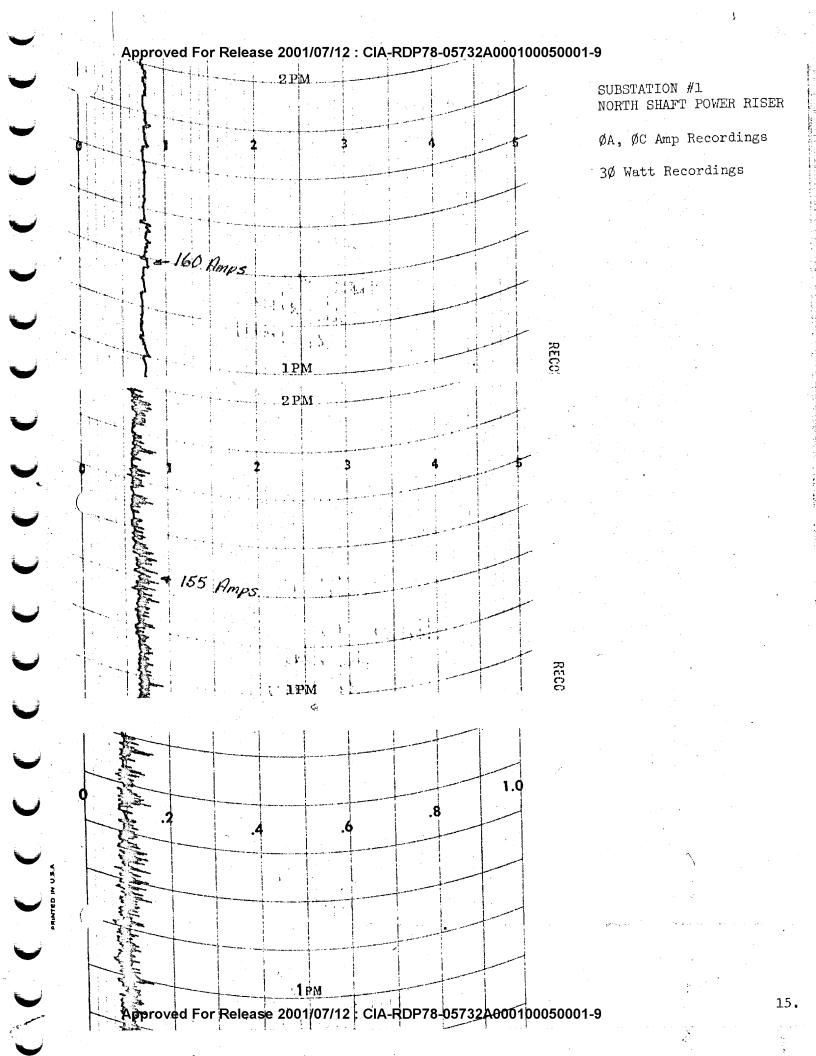

SUBSTATION #1 LIGHTING RISER HORTH SHAFT


START: 8:00 P.M. 10/23/68 STOP: 8:00 P.M. 10/28/68

Maximum	Amperes	ØA 5	30A	Time:	2:00	P.M.
Minimum			80A	Time:	2:00	A.M.
Maximum	Amperes	øc 1	190A	Time:	2:00	P.M.
Minimum			58A	Time:	2:00	A.M.
Maximum	Watts:	į	105KW	Time:	2:00	P.M.
Minimum	Watts:		54KW	Time:	2:00	A.M.
P.F. at	Maximum	Watts:	!	.96		
P.F. at	Minimum	Watts:	;	.92		

CHARACTERISTICS:

Load picks up at 8:00 A.M., continues until approximately 6:00 P.M.

Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

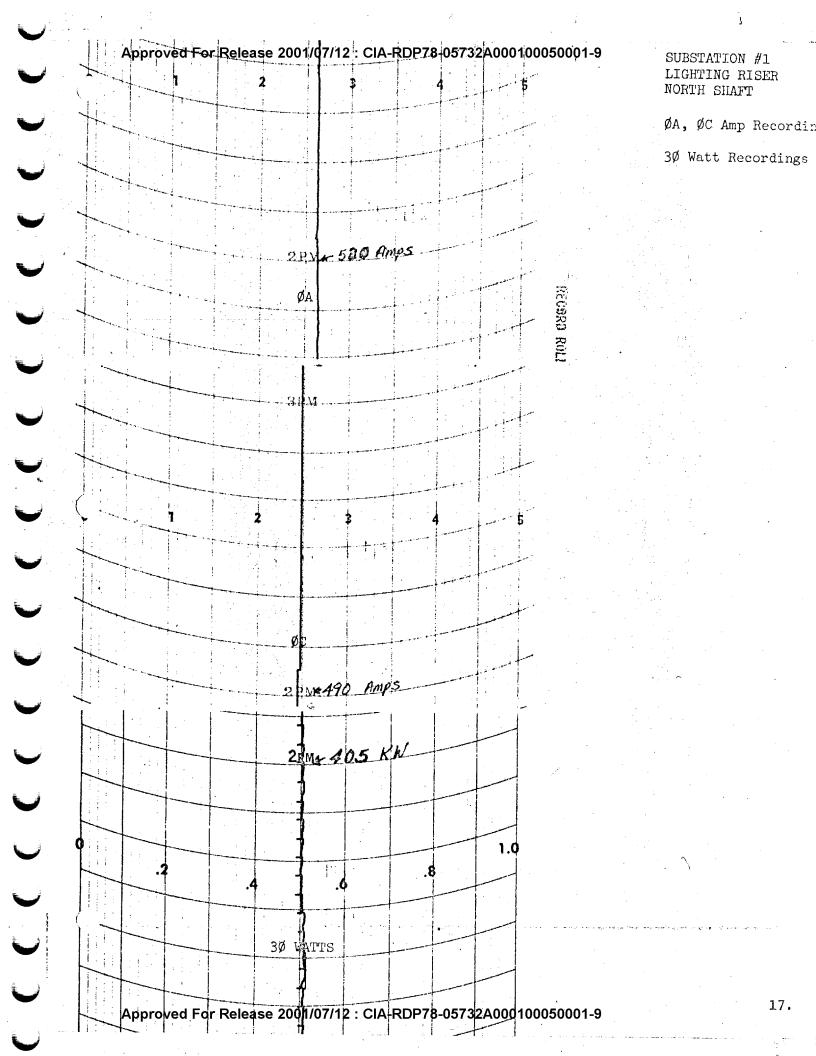


SUBSTATION #1 MCC #1 E	QUIPMENT AREA	, NORTH END	START: STOP:	10:00 P.M. 10/28/68 6:00 P.M. 10/31/68
Maximum Amperes Minimum Amperes		Time: Time:	1:50 P.M. 3:20 A.M.	
Maximum Amperes Minimum Amperes		Time: Time:	1:50 P.M. 3:20 A.M.	
Maximum Watts: Minimum Watts:	352KW 336KW	Time:	1:50 P.M. 3:20 A.M.	
P.F. at Maximum P.F. at Minimum		.91 .89		

CHARACTERISTICS:

Load remained constant throughout recording period, characterized by heavy motor starting inrush currents.


Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

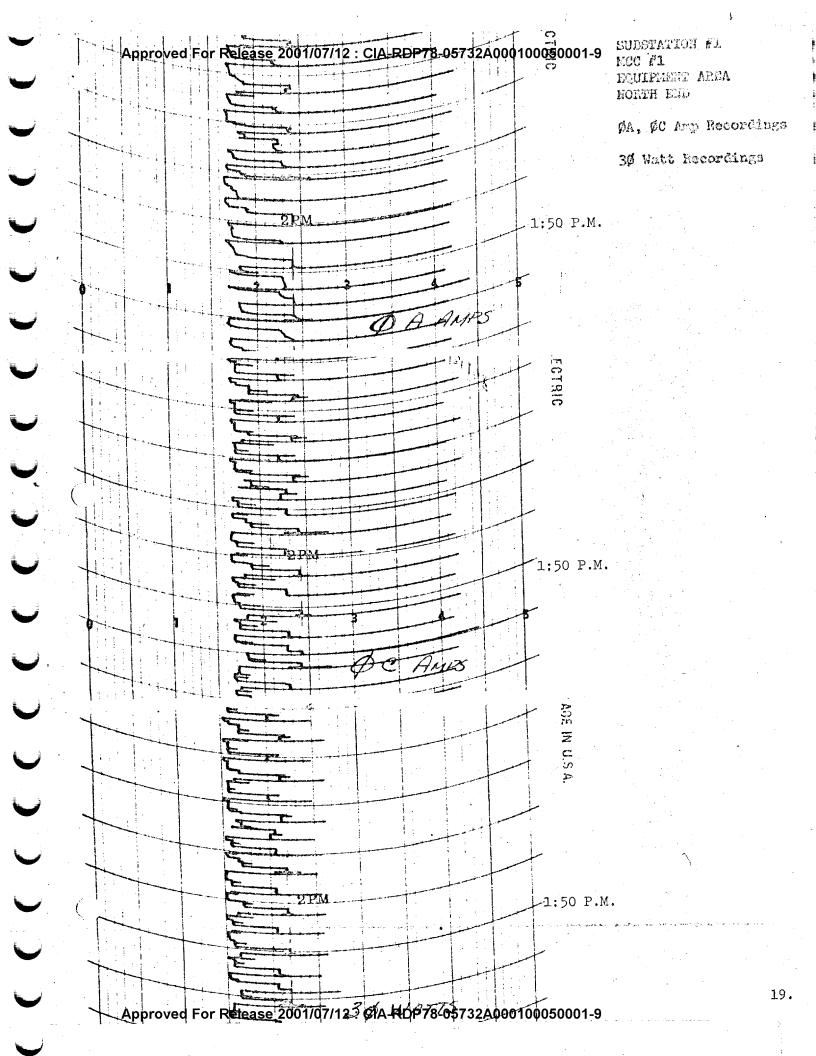

SUBSTATIO	H #3 SOUTH,	POWER	RISER	SOUTH	SHAFT	START: STOP:		10/31/68 11/ 6/68
	ximum Ampera nimum Ampera	• .	100A 35A		Time: Time:	10:10 6:30		
	ximum Ampere nimum Ampere	* .	100A . 35A		Time:	10:10 6:30		š .
	ximum Watts: oimum Watts:	-	64KW 16KW	*	Time:	10:10 6:30		
	F. at Maxim F. at Minim				.80 .55			

CHARACTERISTICS:

Load picks up at 7:00 A.M., continues until approximately 3:30 P.M. Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

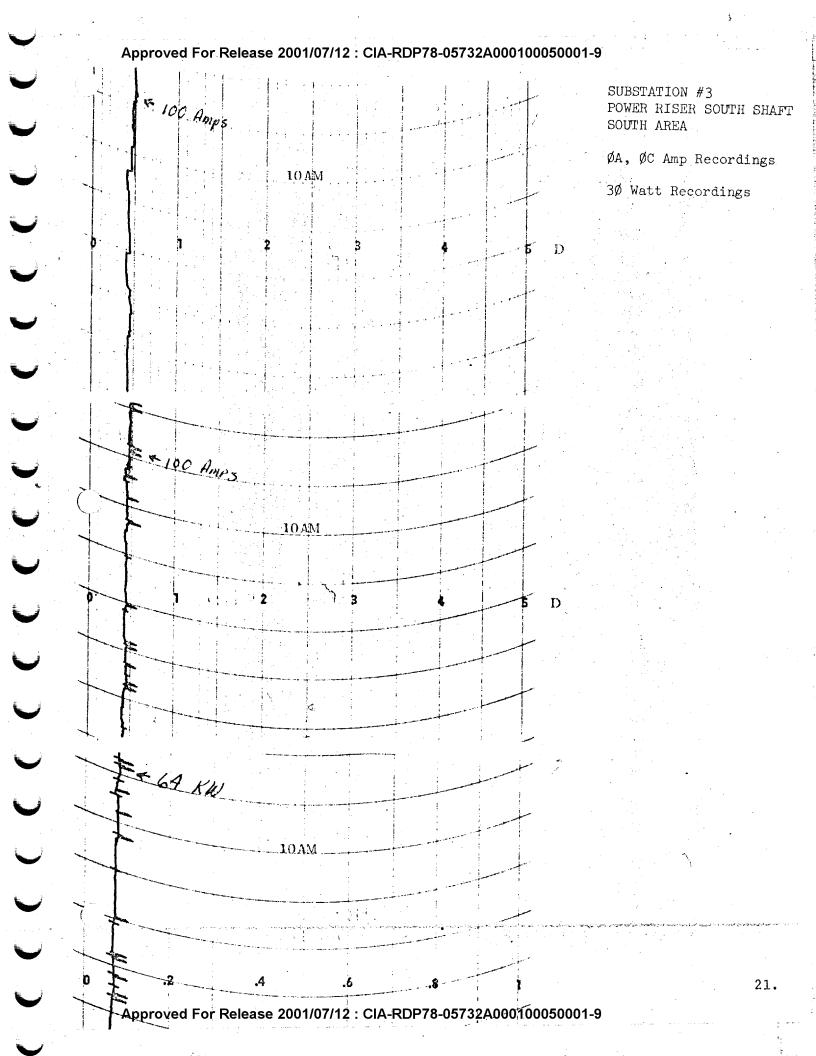

SUBSTA	TION #3	SOUTH MC	C #3	EQUIPMENT	AREA	START: STOP:	11/6/68 11/9/68	7:00 1:00
		Amperes Amperes		640a 460a	Time:	10:50 A.M. 9:00 A.M.		
	Meximum Minimum	Amperes Amperes	•	630A 470A	Time:	10:50 A.M. 9:00 A.M.		
	Meximum Minimum	-		465KW 332KW	Time: Time:	10:50 A.M. 9:00 A.M.	*	

P.F. at Maximum Watts: .91 P.F. at Minimum Watts: .88


Ć

CHARACTERISTICS:

Load remains constant, reasonably, over twenty-four period for entire recording period.

Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.


A.M. P.M.

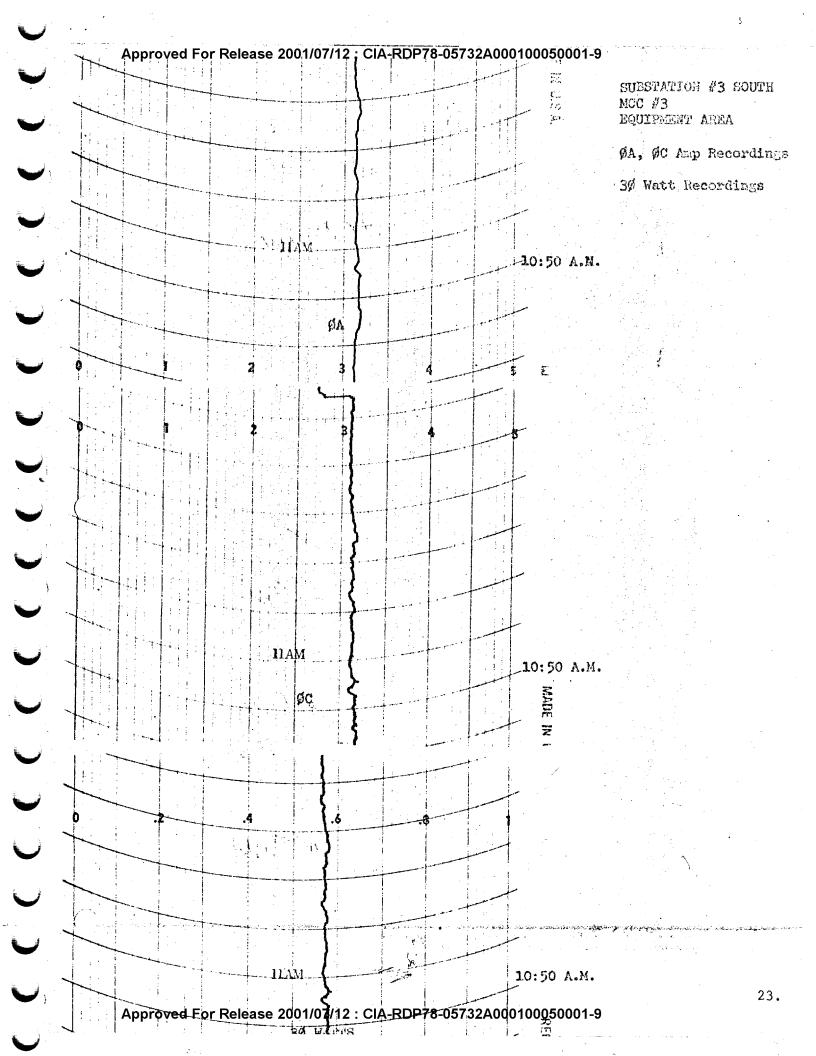

SUBSTA	ATION #3 SOUTH 1	ijghtii	IG RISER,	, SO	UTH SHAFT	START: STOP:	4:00 P.M. 6:00 P.M.	
	Maximum Ampere Minimum Ampere		140A 30A		Time:	1:50 P.M. 3:00 A.M.		
	Maximum Ampere Minimum Ampere	-	475A 40A		Time: Time:	1:50 P.M. 3:00 A.M.	.	
	Maximum Watts: Minimum Watts:		380KM	ź	Time: Time:	1:50 P.M. 3:00 A.M.		
Mary and the second of the sec	P.F. at Maxim P.F. at Minim				•99 •97			

CHARACTERISTICS:

Load picks up at 7:30 A.M., continues until approximately 4:30 P.M. Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

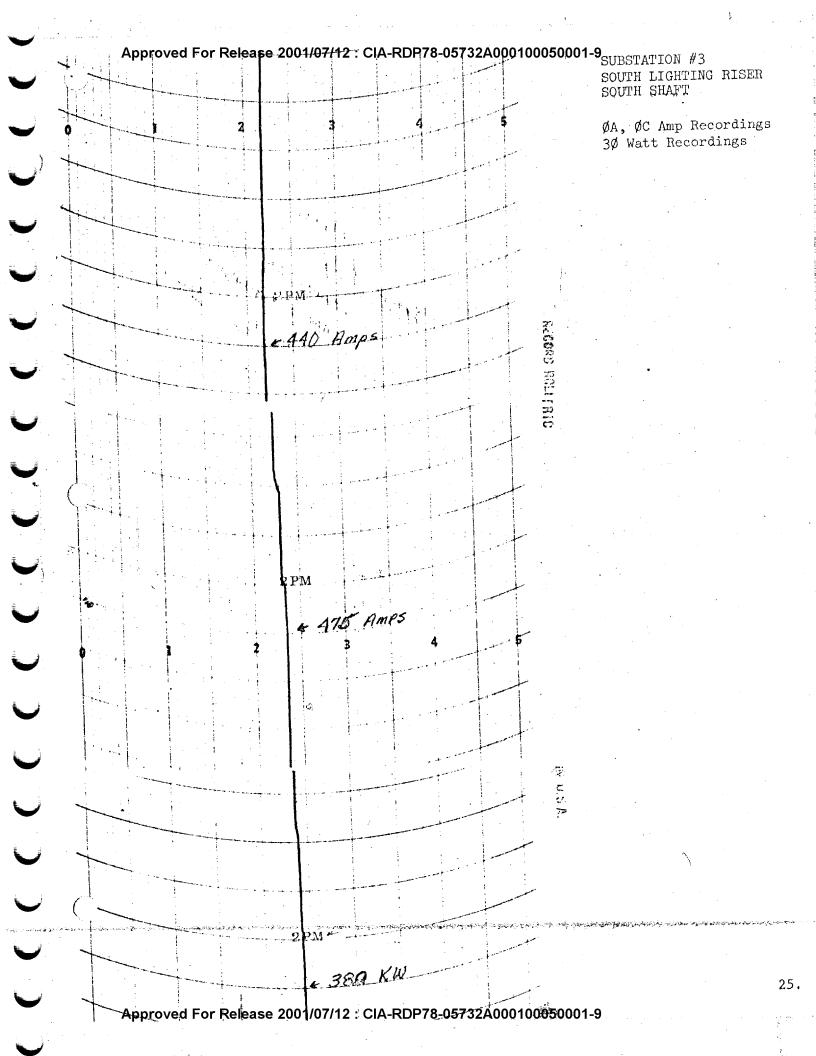

SUBSTATION #3 SOUTH AREA MOTOR FEEDER


START: 7:00 P.M. 11/14/68 STOP: 12:00 P.M. 11/21/68

Maximum Amperes		Time:	4:00 A.M.
Minimum Amperes	ØA 10A	Time:	2:00 P.M.
Maximum Amperes		Time:	4:00 A.M.
Minimum Amperes	ØC 7A	Time:	2:00 P.M.
Maximum Watts:	8kw	Time:	4:00 A.M.
Minimum Watts:	бки	Time:	2:00 P.M.
P.F. at Maximum		.91	
P.F. at Minimum	Watts:	.86	

CHARACTERISTICS:

Load extremely light and constant over recording period.

Line voltage spread is from approximately 460 volt minimum to 475 volt maximum. Voltage drop is normally experienced on or about 8:00 A.M. to 8:30 A.M. Subsequently, voltage rise is normally experienced on or about 4:30 P.M. Varying degrees of voltage drop is also experienced during other than normal work hours whenever manufacturing processes are in operation.

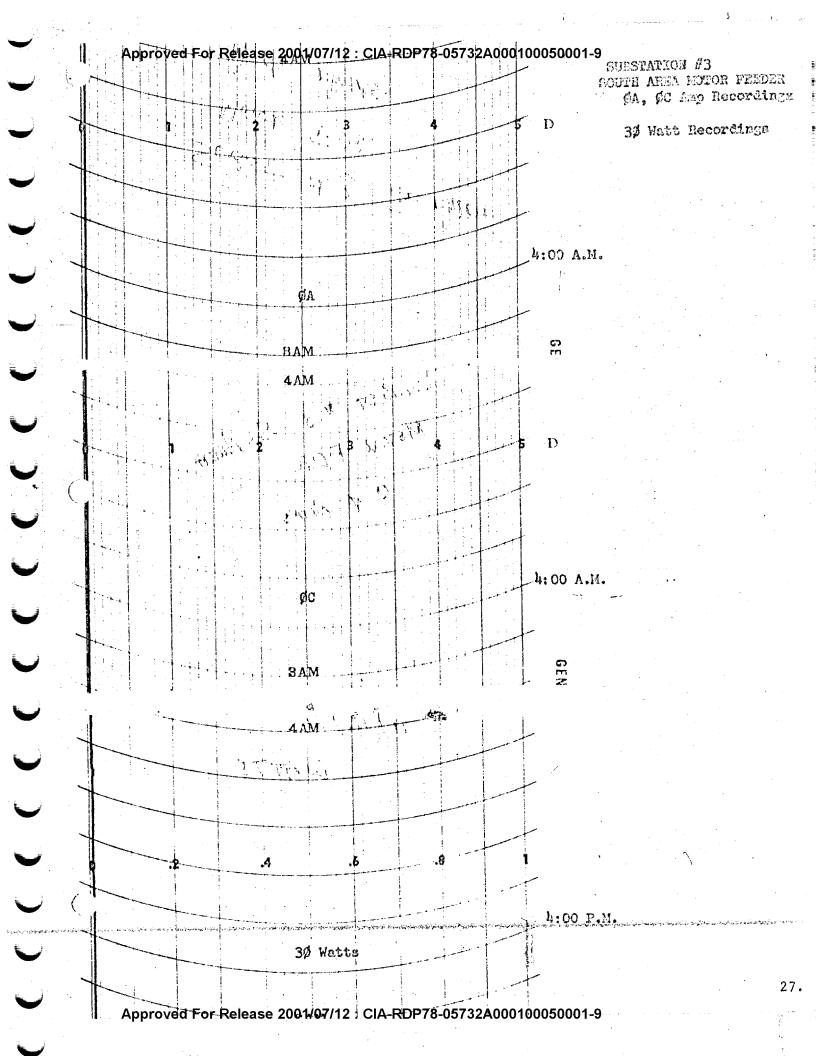

SECTION 2

APPENDIX G .

The following pages constitute typical Standard GSA Maintenance Guides.

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

Pull and tag safety switch.
See Crafts Handbook, chapts 4 and 5.
Review manufacturer's instructions.

TOOLS:

Portable vacuum
Lubricants and equipment

CHECK POINTS:

1. Examine structure, air passages, dampers, louvers, screens, filter and frame, spray piping, nozzles, pans, drains, insulation, etc.

2. Clean thoroughly, remove dirt, rust, build-up, etc.

3. Examine pump, piping and sprays.

NOTE: Condition of bearings, shaft packing gland, valves, etc. Repack if required.

A-11 AIR HANDLING UNIT

Frequency A Avg. time for: Up to 5000cfm 5000 to 15000 cfm Over 15000 cfm

CHECK POINTS:

4. Clean and examine motor and controls, check bearings.

5. Vacuum or blow out motor windings.

6. Check over fan, structure, bearings, belts, etc.

7. Comply with lubrication schedule.

8. Paint or touch-up as required.

. 9. Install filter. (Except roll type.)

10. Operate to test all components.

11. Check chemical treatment equipment, if used.

12. Report any needed work.

13. Clean up area and equipment.

14. Inspect and/or test devices or controls used to protect against freezing.

A-12 AIR OUTLETS, CEILING DIFFUSERS, WALL AND CEILING GRILLS, REGISTERS

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt. 4.

TOOLS:

Portable vacuum
Cleaning equipment
Ladder of proper size
Powdered Graphite and Puff-box applicator
CHECK POINTS:

1. Vacuum off or remove dirt.

2. Wipe clean.

3. Inspect unit, noting levers, deflectors and adjustable parts. Do not change adjustment.

4. Check connection to duct or throatpiece for any way air may leak out.

5. Lubricate joints with powdered graphite, wipe off excess.

6. Report any defects.

Frequency A
Avg. time:
10000 sq. ft. (net) = 8 hrs.

CHECK POINTS: (continued)

7. Clean up any dirt in room resulting from cleaning the air outlets.

NOTE:

This card applies to locations where cleaning air outlets is done by helpers from the shop. If it is done by the cleaning force the work should be included in the cleaning schedule.

A-12 AIR OUTLETS, CEILING DIFFUSERS, WALL AND CEILING GRILLS, REGISTERS

AIR WASHER A-13

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapts. & and 5. Review manufacturer's instructions.

TOOLS:

Replacement filters Portable vacuum

CHECK POINTS:

1. Secure all fans, sprays, etc.

2. Remove filters. (Except oil bath)

3. Vacuum all dirt from filter, frame, structure, and related parts.

4. Check if there is any way air can by-pass filter. Correct or report findings.

5. Replace filters. (Except oil bath)

Frequency Q Avg. time for: unit Up to 20000 cfm 20000 to 75000 cfm Over 75000 cfm

CHECK POINTS: (continued)

6. Comply with lubrication schedule.

7. Observe operation of all units. Look for loose or worn belts, and observe any unusual noise, vibration, or odor.

8. Report any needed work you cannot

AIR WASHERS

A-14

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt. 4.

TOOLS:

Portable vacuum Steam Hose Service tools for pumps, fans, sprays, etc. Lubricants and lube equipment.

CHECK POINTS:

1. Examine all structural elements f.a. openings, louvers, screens, dampers, connecting linkages, filter frame, etc. Look for corrosion, rust, deterioration, damage, etc. Clean and flush pans. 2. Remove filter and vacuum dirt. Look for places where air could by-pass filter. 3. Remove dirt from fins of coils.

Check for leaks in coils and/or fittings.

4. Check eliminators and clean them.

5. Check controls especially those pro-

6. Go over spray system, pump, piping, AIR WASHERS A-14

Frequency A Avg. time for unit: Up to 20000 cfm 20000 to 75000 cfm Over 75000 cfm

CHECK POINTS: (continued)

spray heads. Make up water line and valves, over-flow, drains, etc.

7. Check fan, bearings, belts.

8. Examine motor(s), starter, push button, etc. Check contacts, brushes, etc.

9. Comply with lubrication schedule.

10. Wire brush and clean where required. Touch-up or repaint as needed.

 Replace filter(s).
 Report any work that is needed. tecting against freezing. 13. Nos. 2 and 11 do not apply to roll type filter.

C-1 CHECK VALVES

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt. 3.
Review applicable manufacturer's instructions.

Frequency A
Avg. time for:
Up to 2"
2½ to 4"
4 to 6"
Over 6"

TCC LS:

Spare parts Gaskets

CHECK POINTS:

1. Determine if check is operating and holding while valve is in service. Small size valves should be replaced with a new or rebuilt one but large valves may be worked on in the line.

2. For large valves: Remove cover and clean. Determine fault. Replace flapper, swing, pin, etc., as needed. Inspect seat and grind in as required. Replace gasket and cover.

C-1 CHECK VALVES

C-3 COILS, HEATING, FOR H.W. TANK, ECONOMIZER, ETC.

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

在我们的现在分词,我们就是我们的人,我们就是我们的人,我们就是我们的人,我们就是我们的人,我们就是我们的人,我们就会会会是我们的人,我们就会会会会会会会会会会会 第一章

SAFETY:

See Crafts Handbook, chapt. 3. Review manufacturer's literature. Frequency 3 years (Same as H.W. Tank)

TOOLS:

Standard Tank cleaning tools Trash can(s)

CHECK POINTS:

- 1. While tank is open for cleaning, inspection, tests, etc., examine coils for rust, pitting, corrosion, etc.
- 2. Clean thoroughly.
- 3. Test coils. Repair leaks (if any).
- 4. Replace steam traps that are blowing through or faulty.

C-3 COILS, HEATING, FOR H.W. TANK, ECONOMIZER, ETC.

COILS, PREHEAT, REHEAT, ETC. (REMOTE LOCATIONS)

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt 4. Review applicable manufacturer!s literature.

TOOLS:

Portable vacuum Steam or air hose Cleaning equipment

CHECK POINTS:

- I. Vacuum or blow out the fins, coils, etc.
- 2. Remove obstructions to air flow.
- Check coils. Correct or report any 3.
- 4. Test and inspect controls that protect against freezing.

Frequency A Avg. time for coils Up to 20 sq.ft.surface area 20 to 50 50 to 100 Over 100

NOTE:

This card applies to coils that are not part of an air washer or air handling unit.

(REMOTE LOCATIONS) COILS, PREHEAT, REHEAT, ETC. C-h

CONTROLS (HEATING AND AIRCONDITIONING)

CENTRAL SYSTEM GSA-PBS OFFICE OF BUILDINGS MANAGEMENT

PREVENTIVE MAINTENANCE GUIDE

SAFETY: See Crafts Handbook, chapt. 4. Review applicable manufacturer's instructions.

TOOLS:

Test kit Manufacturer's literature

CHECK POINTS:

Observe operation of control system to discover weaknesses or need for attention. Read and understand instructions before making adjustments or calibrations.

- 1. Check all air distribution lines.
- Stop all leaks. Check compressed air PRV for correct
- pressure. 3. Check operation of thermostats, and humidistats for accuracy (use test kit).

Adjust or calibrate as required.

Frequency A Avg. time required for: Auto control switch Differential controller Freezestat Humidistat Modutrol motor Motorized damper, louver Pneumatic relay Thermostat Control panel

Page 1 of 2

(continued) CHECK POINTS:

4. Test bellows and diaphrams of controlled elements (valves, damper motors, etc.). Replace defective units. 5. Valves controlling flow to preheat, reheat, chilled water coils, etc., should operate without binding and close *tightly adjust if necessary. 6. Lubricate packed-type valves (use

oil and graphite unless manufacturer specifies something else).

(continued)

Adjust or callbrate as required.

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

6 CONTROLS, (HEATING AND AIRCONDITIONING)
CENTRAL SYSTEM

Page 2 of 2

CHECK POINTS: (continued)

7. Relays, pilot valves, pressure regulators. Do they operate properly? Adjust as required. Use test kit and manufacturer's instructions.

8. Electric pneumatic and pneumatic electric control units. Stop leaks, adjust for proper closing tighten loose connections. Operate to show continuity and proper functioning.

9. Motorized valves, dampers, linkage, etc. Check freedom of motion position of limit stops, excessive play. Lubricate as prescribed.

10. Impose simulated conditions to activate controls and check operation.
11. Replace burnt out indicator lamps, bulls-eye, etc.

NOTE: Do not attempt to rebuild control units in place. Replace with a new or rebuilt unit and take to shop.

C-6 CONTROLS, (HEATING AND AIRCONDITIONING) CENTRAL SYSTEM

C-8 CONTROLS, REFRIGERATING MACHINE ROOM

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

Secure, valve off, or disconnect as applicable.

TOOLS:

Circuit analyzer Replacement parts Portable vacuum

CHECK POINTS:

- I. Clean, vacuum or blow out, remove obstructions.
- 2. Test continuity and operation.
- 3. Replace any worn, pitted or defective parts.
- 4. Calibrate, adjust, or set.
- 5. Test by imposing appropriate signal and observing response or result. Replace any indicator lamps, bulls-eyes,
- 6. Report need for any other work.

C-8 CONTROLS, REFRIGERATING MACHINE ROOM

Frequency A
Avg. time required
for each unit:
Electric interlocks
Electric relays
Solenoid
Pressure switches
Thermostatic element
Thermostatic switch
Oil pressure cut-off and alarm
Vaporstat
Pressure and vacuum gages
Control panel

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

COOLING TOWER

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt 4. Review manufacturer's instructions.

TOOLS:

Cleaning materials, lubricants, and standard tools.

CHECK POINTS:

(Before seasonal start-up)

- 1. Remove dirt, trash, algae from water pans - flush.
- 2. Paint water pans if needed.
- 3. Check water outlets.
- 4. Check fan, bearings, belts, pumps, etc.
- Check gear box. Add or change oil if needed.
- 6. Check drive shafts.
- 7. Check control and float valves.
- Check screens.
- Check water treatment equipment.

COOLING TOWER

Frequency A Time required Up to 50 ton 50 to 100 ton 100 to 500 ton 500 to 1000 ton Over 1000 ton

CHECK POINTS: (continued)

10. Check motor and starters, belts, etc.

11. Check structural fittings.

- 12. Continuous bleed line should be open.
- 13. Drain, flush out thoroughly.
- 14. Clean chemically, using approved materials, and neutralize.
- 15. Comply with lubrication schedule.

NOTE:

PREVENTIVE MAINTENANCE GUIDE

Drain water from all lines prior to freezing weather.

EXPANSION JOINTS IN PIPING ·E-18

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT

SAFETY: See Crafts Handbook, chapts. 3 and 1.

TOOLS:

Packing Packing tools and lubricant.

CHECK POINTS:

BELLONS TYPE JOINT 1.- Replace when a leak occurs. 2. When possible repair bellows by SLIP-TYPE JOINT-WITH PACKING-GLAND welding. 1. Examine joint closely, look for evidence of displacement, loose or defective anchors or bolts, alignment of joint with piping, guide rods, etc. Correct what can be done with pressure on report remaining items.

2. Observe packing gland, adjust to stop weeping or leaks.

EXPANSION JOINTS IN PIPING

Frequency A Avg. time for: 1-3" diam. 4-6" diam. Over 6" diam.

CHECK POINTS: (continued) SLIP-TYPE JOINT-WITH PACKING-GLAND

3. Renew packing completely when system is down for other reasons such as repair, overhaul, or maintenance of other components.

GUN-PACKED TYPE

Perform work prescribed in (1) and (2) for slip-type joint with gland.

2. Add packing if needed.

Approved For Release 2001/07/12: CIA-RDP78-05732A000100050001-9

FAN, CENTRIFUGAL F-l

GSA-PES OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY: See Crafts Handbook, chapt. 4.

TOOLS: Wire brushes, scrapers, lubricant

and lube portable vacuum equipment.

CHECK POINTS: 1. Check over unit thoroughly. Look for signs of rust, corrosion, or deterioration. Inspect interior of

housing if there are openings to do so. 2. Check insulation, repair if needed.

3. Check structural members, vibration, eliminators and flexible connections.

4. Check bearings, shaft, pulley, and alignment with motor (if vibration is excessive check balance of rotor).

5. Comply with lubrication schedule.

6. Check belts, adjust tension or replace as required.

FAN, CENTRIFUGAL

Frequency A Avg. time for fan Up to 1500 cfm 1500 to 5000 cfm 5000 to 10000 cfm Over 10000 cfm

CHECK POINTS: (continued)

7. Check motor, controls, starter, etc. Observe bearings. Look for excessive clearance, unusual vibration, noise, odor, etc.

8. Blow out or vacuum windings, if

necessary.

9. Clean complete unit. Touch up or paint as required

NOTE: This card applies to fans that are not a part of a unit.

FILTER, ROLL TYPE DISPOSABLE MEDIA, MANUAL OR MOTOR DRIVEN

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY: See Crafts Handbook, chapt 4. Review manufacturer's instructions. Secure unit and fans and tag switches.

TOOLS: Lubricants and lube equipment Powdered graphite in puff-box Draft gauge

CHECK POINTS:

F-6

1. Check over framework and structure. Look for loose or missing bolts, places air can leak by, condition of flashing or caulking, etc.

2. Check all moving parts for proper alignment, freedom of motion, excessive ...clearance or play, etc.

or take-up roll, correct tracking of media, etc. On manual operation check

FILTER, ROLL TYPE WITH DISPOSABLE MEDIA, MANUAL OR MOTOR DRIVEN wheel or hand crank.

Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9

Frequency SA Or when roll is being changed. Avg. time per unit:

(continued) CHECK POINTS:

4. On motor drives, check pressure sensing device(s) and/or pressure switches. Test settings for starting and stopping motor.

5. Check out motor, starter, controls, selector switch for auto. warning or

indicator lights, etc.

6. Check oil in gear case. Change or replemish as required. Comply with lubrication schedule. Use graphite where it is suitable.

3. Check head or powered roll, tail 7. Replace filter media when roll is used up. Follow manufacturer's instructions.

H-1 HOT WATER GENERATORS

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:
See Crafts Handbook, chapt. 3.

Frequency 3 years Time required

TOOLS:

Standard

CHECK POINTS:

- 1. From operating experience, performance of controls, drains. Condition of insulation, etc., are known.
- 2. Drain and flush tank (for ferrous tanks).
- 3. Remove built-up rust, scale, etc.
- 4. Scrape or wire brush to clean metal.
- 5. Test for tightness.
- 6. Apply coating (use approved materials).
- 7. Replace any damaged or missing insulation.
- 8. Paint or touch-up as required.
- 9. Relabel if needed.

G-1 HOT WATER GENERATORS

PUMP, CENTRIFUGAL - NOT INTEGRAL WITH MOTOR

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:
See Crafts Handbook, chapt. 4.

TOOLS:

P-L

Seals Grease Oil

Packing

Packing tools

CHECK POINTS:

1. Examine seal or packing, replace seal or repack pump if necessary.

2. Adjust the packing gland for drip from water seal. If a grease seal check grease cup for grease pressure.
3. Clean and lubricate coupling and

bearings on pump.

Frequency A Time required

With motor Up to $7\frac{1}{2}$ HP With motor 10 to 20 HP

With motor 25 to 50 HP With motor Over 50 HP

CHECK POINTS: (continued)

- 4. Check motor and controls, starter, push button, etc.
- 5. Clean exterior of pump coupling, shaft and motor.
- 6. Check pump operation If pump discharges through a check valve, test if check holds. If not replace check valve.

PUMP, CENTRIFUGAL - NOT INTEGRAL WITH MOTOR

1R-2

REFRIGERATION MACHINE, ABSORBTION TYPE

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT · PREVENTIVE MAINTENANCE GUIDE

SAFETY:

Review manufacturer's instructions.

TOOLS:

Standard

Frequency Q Avg. time for unit: Up to 1:0 tons 40 to 100 tons 100 to 1:00 tons Over 400 tons

CHECK POINTS:

1. Check sight glass. Change filter Purge System

if required.

2. Time air bleed.

3. Check high level cut-out.

4. Inspect probes.

5. General

Add octyl alcohol to solution.

REFRIGERATION MACHINE, ABSORBTION TYPE

REFRIGERATION MACHINE, ABSORBTION TYPE R-3

Page 1 of 2

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SARETY:

Review manufacturer's instructions.

TOOLS:

CHECK POINTS:

Evaporator Circuit

1: Check and service evaporator pump, motor, controls, starters, etc. Lubricate as prescribed .

2. Clean and flush out the seal, water tank, seal chamber, and associated lines.

3. Check purge valve diaphragm. Replace

if necessary.

4. Inspect ball in check valve.

5. Inspect and clean evaporator, spray, header, nozzles, etc. Replace defective

6. Check and service solution pump, motor, controls, starters, etc. Lubricate as prescribed.

Frequency A Avg. time for unit: Up to 40 tons 40 to 100 tons 100 to 400 tons

Over 400 tons

CHECK POINTS: (continued)

7. Check absorber reflex and generator, bulls-eye sight glasses. Replace if required.

8. Check purge valve diaphragm. Replace

if required.

9. Inspect and clean solution spray nozzles. Replace defective ones. Condenser Circuit

10. Clean the absorber and condenser

Solution Circuit

Clean purge tank and purge with water. Clean purge tank and purge with water. follow steps prescribed by manufacturer. (continued)

Approved Facinations 200 1/09/11219. CIAPROP78-05732A000100050001-9

REFRIGERATION MACHINE, ABSORBTION TYPE

Page 2 of 2

CHECK POINTS: (continued)

12. Check adjustment of pressurentrol.

13. Adjust the restrictor.

Adjust high level cut-out.

15. Adjust automatic purge valve.

Follow steps prescribed by manufacturer.

16. Check electric probe level adjustment.

Check sight glass. Replace filter if 17. required.

18. Time air bleed.

19. Add octyl alcohol to solution.

Control System

20. Check capacity control valve, linkage and stem, comply with librication schedule.

21. Replace signal lamps.

22. Check interlocks.

General

23. Check seals on solution pumps and evaporator pump. Replace if required.

REFRIGERATION MACHINE, ABSORBTION TYPE

T-8 TRAPS, STEAM, BUCKET, FLOAT, LIFT, THERMOSTATIC

> GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

R-3

See Crafts Handbook, chapts. 3 and 4.

Frequency A Avg. time

Asbestos or leather-faced gloves Pipe wrenches Spare traps Nipples Strainers Chalk

CHECK POINTS:

1. Determine if trap is operating properly while it is in the line.

2. Remove faulty trap from line and replace with a new or rebuilt one.

blow down valve, nipples, etc. Replace any found defective.

4. Label all faulty traps "EJ" with chalk and return them to sho.

CHECK POINTS: (continued)

Rebuild or repair at bench.

a. Disassemble

b. Examine all working parts giving close attention to valve and While trap is out, examine strainer, see seat.

c. Replace all defective parts.

d. Reassemble and test.

e. Mark serviceable units CK and put in cupboard stock.

T-8Approved For Release 2001/07/12/DGIA-RPP78-05732A000100050001-9

V-6

VALVES, MOTOR OPERATED

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt. 3.

Frequency A Time per unit

TOOLS:

Powdered graphite in puff box Cleaning equipment

CHECK POINTS:

1. Wite off unit and make visual examination of all parts.

2. Operate from limit to limit.
Observe operation, look for binding, sluggishness, action of limits, etc.

3. Determine if value seats and holds properly

h. Apply graphite to moving parts of valve.

CHECK POINTS: (continued)

5. Check lubrication schedule of motor and gear box.

6. Check contacts, brushes, etc.,and motor, controls, switches, etc.7. Correct any deficiencies, Report any needed work that you do not do.

V-6

VALVES, MOTOR OPERATED

V-7

VALVE, SAFETY OR RELIEF

GSA-PBS OFFICE OF BUILDINGS MANAGEMENT PREVENTIVE MAINTENANCE GUIDE

SAFETY:

See Crafts Handbook, chapt. 4.

TOOLS:

ASME construction code Boiler room tools

CHECK POINTS:

1. While boiler or tank is being serviced, examine value for leaks, evidence of wear, wire drawing, corrosion, or other deficiencies.

2. Test action by raising pressure.

NOTE popping pressure and reseating pressure. Record these values.

Frequency A Avg. time for Up to 2" diam. 2 to 4" Over 4"

PBS P 5850.1A August 9, 1965

Guide No.	Item		Frequency Per Year	Hours
A-3	Air Circuit Breaker Low Voltage High Voltage		1/2 1	1.00
A-4	Air Compressor 1 hp. and under 1 to 20 hp. Over 20 hp.		1 1 1	.75 1.75 2.00
A-6	A/C Machine-Pkge Unit 7-1/2 Ton & Under 10 to 15 Ton Over 15 Ton		1 1 1	8.75 9.25 10.00
A=8	A/C Window Unit		1	1.00
A-9	Air Cooled Condenser 10 Ton & Under 10 to 30 Ton Over 30 Ton		1 1 1	.75 1.00 1.75
A-11	Air Handler Unit Up to 5000 c.f.m. 5000 to 15,000 c.f.m. Over 15,000 c.f.m.		1 1 1	1.50 2.75 4.75
A-12	Ceiling Diffusers		1	. 35
A-14	Air Washer Up to 20,000 c.f.m. 20,000 to 75,000 c.f. Over 75,000 c.f.m.	m.	1 1 1	4.50 8.00 9.00
A-15	Alarms		4	. 25
B-1	Battery Charger		12	. 25

Appendix F. Preventive Maintenance Standards

PBS P 5850.1A august 9, 1965

			······································
Guide No.	Item	Frequency Per Year	Hours
B-2	Boiler, Cast Iron or Steel	• • • • • • • • • • • • • • • • • • •	Group Time
	Coal Fired	1	Group Time
	Oil Fired	1	Group Time
	Gas Fired	en en Variante de la Companya de la Companya de la Companya de la Compa	
C-2	Central Clock Systems	2	7.25
C-4	Coils, Preheat, Reheat (Remote)		
	Up to 20 sq. ft. Surface	1	.50
	20 to 50 sq. ft. Surface	1	.75
	50 to 100 sq. ft. Surface	1	1.00
1	Over 100 sq. ft. Surface	1	1.7 5
		The state of the s	
C-9	Cooling Tower		7 00
1	Up to 50 Ton	1	7.00
1	50 to 500 Ton	1	14.50
	500 to 1,000 Ton	1	29.00
	Over 1,000 Ton	1 •	38.50
D-1	Door, Power Operated	2	1.25
D-2	Dumbwaiter	4	3.7 5
D-3	Drains, Areaway, Driveway	2	•50
D-4	Drains, Roof, Gutter (per 100'), Etc.	1	.50
E-1	Electric Panels (Power-Lighting)	1/2	.50
E-3	Electrostatic Filter	26	2.50
E-9	Elevator, Hydraulic	12	5.75
E-10	Elevator, Hydraulic	1	15.25
E-11	Emergency Generator	Local Requirements	1.75
E-12	Emergency Generator	1	3.75
E-15	Escalator	12	1.00

Appendix F




PBS P 5850.1A August 9, 1965

Guide No.	Etem Hermanian Company Compan	Frequency Per Year	Hours
E-16	Escalator	1	96.00
E-17	Evaporative Condenser		
	Up to 50 Ton	1	7.50
	Over 50 Ton	1	11.75
E-18	Expansion Joints in Piping	1	1,25
F-1	Fan, Centrifugal		
	Up to 1,500 c.f.m.	1	1.00
	1,500 to 5,000 c.f.m.	1	1.50
	5,000 to 10,000 c.f.m.	1	2.00
	Over 10,000 c.f.m.	1	2.75
F-3	Fans, Propeller	·	·
	Över 24" Diameter	1	. 75
F-5	Filter, Moveable Curtain, 011 Coated		1.75
F-6	Filter, Roll Type	As Required	1.75
F-6A	Filter, Throw-Away	As Required	.04
F-7	Filter, Viscous Type	As Required	.50
F-16	Special Lighting	1	.50
I-1;C-3	Hot Water Generator	1/3	4.50
G-2	Grease Traps	12	. 75
I-2	Induction Unit (Under Window Type)		
	Fan Coil Units (Under Window Type	2	. 75
	Low Pressure	1	.75
	High Pressure	4	.50
M-3	Motor Generators Sets	1	2.50
0-2	Oil Circuit Breakers	1	4.25
P-6	Pumps, (Not part of system)	1	1.75

Appendix !

PBS P 5850.1A ugust 9, 1965

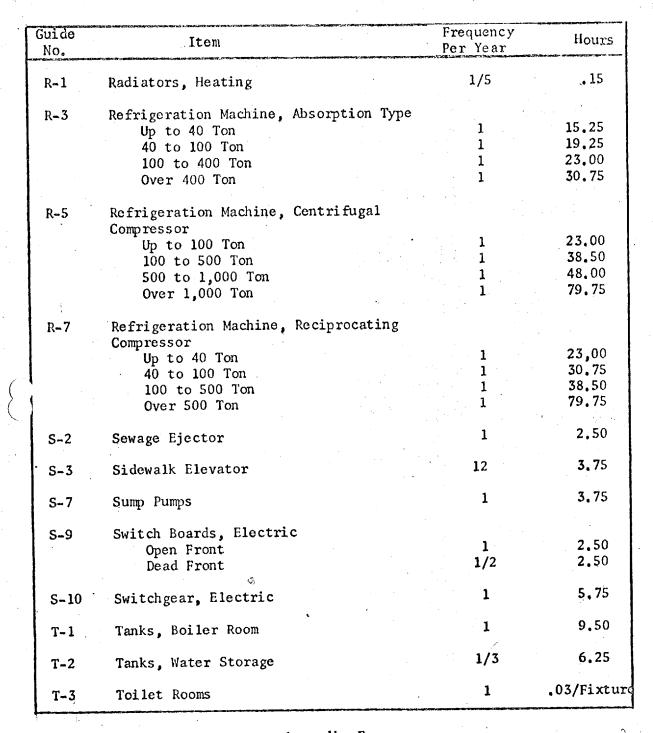

Appendix F

and the state of t

COLUMN STATE STATE OF STATE STATE



PBS P 5850.1A August 9, 1965

Guide No.	I tem		Frequency Per Year	Hours
T-6	Transformer, Synthetic Oil-Filled		1/2	2.00
T-8	Traps, Steam High Pressure Low Pressure	e e	1 1/5	.50 .50
U-1	Unit Heaters		1	1.00
V-1	Vacuum Producer		1	3.00
V-2	Vacuum Pump Unit		1	7.75
V-5	Valve, Manually Operated Main Line or Critical Other Over 2"		1 1/5	1.00 .50
V-6	Valves, Motor Operated			1,50
E-4	Elevator, Electric		6	1,50
E-5	Elevator, Electric		12	4.00
E- 6	Elevator, Electric		4	5.50
E-7	Elevator, Electric		2	11.50
E-8	Elevator, Electric		1	15.25
EA-1	Elevator, Electric		1 (1st Month)	17.75
EA-2	Elevator, Electric		1 (2nd Month)	17.75
EA-3	Elevator, Electric	1	1 (3rd Month)	17.75
EA-4	Elevator, Electric		1 (4th Month)	17.75
EA-5	Elevator, Electric		1 (5th Month)	17.75
EA-6	Elevator, Electric		1 (6th Month)	17.7 5

Appendix F



PBS P 5850.1A August 9, 1965

Guide No.	Items	naphramati an'	Frequency Per Year	Hours
EA-7	Elevator, Electric	entre en antique annique reference en entre en entre entre en entre entr	(7th mo.)	17.75
EA-8	Elevator, Electric		(8th mo.)	17.75
EA-9	Elevator, Electric		(9th mo.)	17.75
EA-10	Elevator, Electric	e de la companya de l	(10th mo.)	17.75
EA-11	Elevator, Electric		(11th mo.)	17,75
EA-12	Elevator, Electric		(12th mo.)	17,75
A-1	Acid Pits		1 Group	Time
A-2	Adjustable Loading Ramp		4	1.25
A-16	Ash Handling Equipment		1 Group	Time
C-6	Central Control System		1 Group	Time
E-13	Entrance Doors		2	1.00
F-20	Fuel Oil Storage Tanks		1 Group	Time
I-1	Incinerator		1	15.25
M-1	Manhole, Electrical		1	2.00
M-2	Manhole, Sewer		1	2.00
0-3	Outside Lighting Systems		1 Group	Time
P-1	Paper Baler		1 Group	Time
P-2	Pneumatic Tube System		2 Group	Time

Appendix F

PBS P 5850.1A August 9, 1965

Guide No.	Items	Frequency Per Year	llours
S-8	Surface Water Pits - Settling Pits	1	Group Time
T-5	Transformer, (Oil Filled)	1	Group Time
T-9	Turbine	- 1 ·	11.50
W-3	Water Softener	As Required	Group Time
W-5	Window Washing Scaffold, Power Operated	1	Group Time
	* F-8 thru F-15 to be added at a later	date.	
-			
			,
	€		
		• *	142 142

Appendix F

~7 and 8

SECTION 2

'APPENDIX H

M - 1 Roof Plan

M - 2 Equipment Room - Upper Level

M - 3 Equipment Room - Lower Level

É - 1 Single Line Diagram

STATINTL Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9 Next 4 Page(s) In Document Exempt Approved For Release 2001/07/12 : CIA-RDP78-05732A000100050001-9